

SCREENED WIRE

1120-

Type of conductor: **TIN-PLATED COPPER**

Working temperature: **T 180°C**


- Wire with twisted strands and external screening



- Sections table:

Code	Sections mm ²	Conductor strand
1120/3	3,00 mm ²	30 x 0,30 + 16 x 3 x 0,15 (external screening)
1120/4	4,00 mm ²	14 x 0,40 + 24 x 3 x 0,20 (external screening)
1120/5	5,00 mm ²	24 x 0,40 + 24 x 3 x 0,20 (external screening)
1120/6	6,00 mm ²	30 x 0,40 + 24 x 3 x 0,20 (external screening)

- Other sections on request.

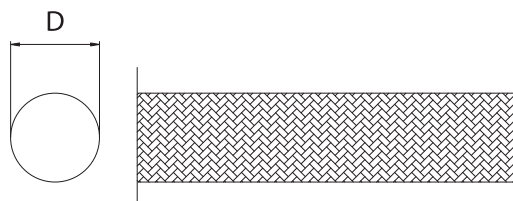

Note: this kind of wires may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").

