

# 5625

## 5625/415

4 Uscite

Connessione 3x2,5 (5625)

Connessione 4x1,5 (5625/415)

Diametro esterno cavo  
(min. - max.) 6,5 - 12mm

250V - 16A


4 Ways

Connection 3x2.5 (5625)

Connection 4x1.5 (5625/415)

External diameter of the cable  
(min. - max.) 6.5 - 12mm

250V - 16A

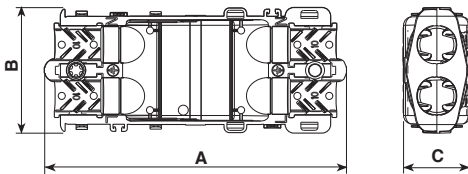

Dimensioni / Dimensions (mm)

A	B	C
105	44	24

Max volume interno disponibile ~ 14,26cm<sup>3</sup>


Max internal room available ~ 14.26cm<sup>3</sup>

Dispositivo di connessione con  
ancoraggio del cavo IP68



Junction device with cord anchorage IP68




### 5625

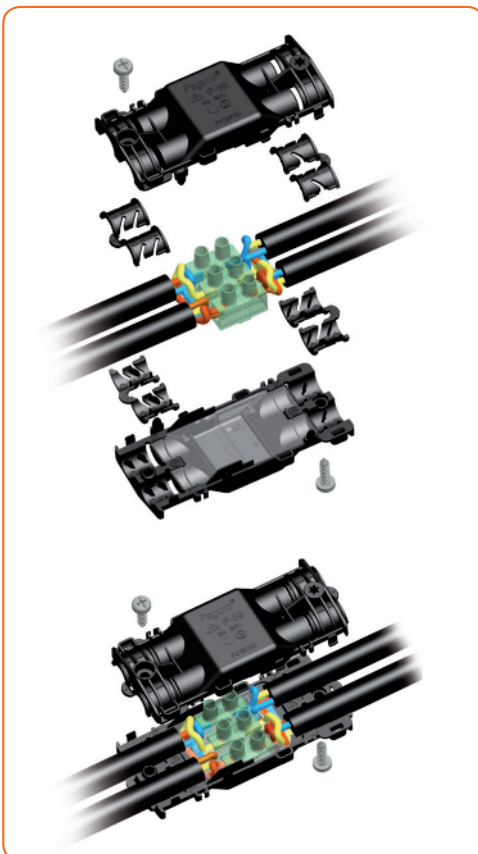

### 5625/415

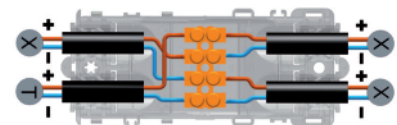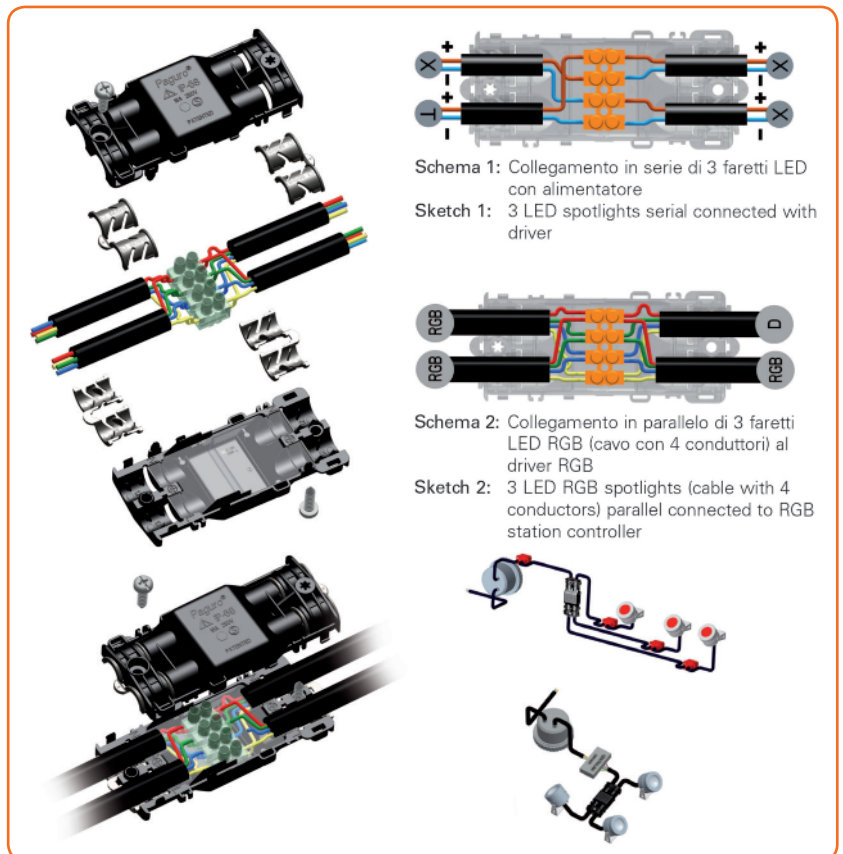

Schema 1: Collegamento in serie di 3 faretti LED con alimentatore  
Sketch 1: 3 LED spotlights serial connected with driver

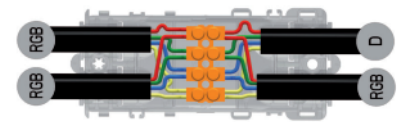

Schema 2: Collegamento in parallelo di 3 faretti LED RGB (cavo con 4 conduttori) al driver RGB  
Sketch 2: 3 LED RGB spotlights (cable with 4 conductors) parallel connected to RGB station controller

