

POLARIZED CONNECTORS PLUG AND SOCKET

599 - 600

601 - 602


603 - 604

Type:	CONNECTORE PLUG MALE + SOCKET FEMALE
Rated voltage:	250 V
Impulsive voltage:	5 kV
Rated current:	10 A
Working temperature:	T -40°C +120°C
Type of clamps to connect the cables:	CRIMPED
Clamps connecting capacity:	0,50 - 1,50 mm²
Protection degree (IP):	IP20
Approval marks:	VDE cULus



- Connection device built with plug male + socket female with safety retaining tooth against the accidental opening.
- external envelope in neutral PA6 V2
- terminals in tin-plated brass crimped (or that shall be crimped) to the supply cables
- The device can be connected both with single-conductor cables and multi-conductors cables (for the cables, refer to "Section 9" of this catalogue).

603: 2 poles male plug. **604:** 2 poles female socket.
599: 3 poles male plug. **600:** 3 poles female socket.
601: 4 poles male plug. **602:** 4 poles female socket.

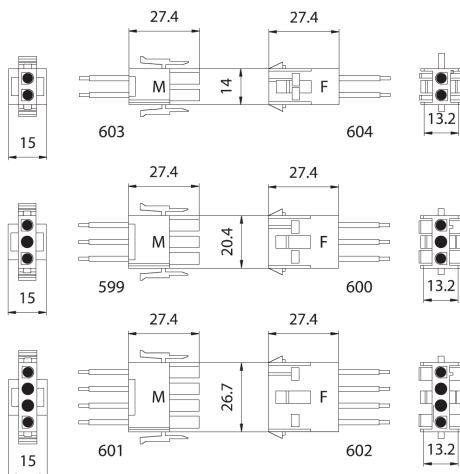

- Indication for possible fixing on panel:

