

COAXIAL CABLES FOR LEDs APPLICATION INSULATED IN FEP + SCREENING + PVC

BE2-- 2010

Type of insulation: FEP + SCREENING + PVC (COAXIAL)

Working temperature: T 70°C for the sheath
T 180°C for the inner core

Type of conductor: TIN-PLATED COPPER (for the internal core)
TIN-PLATED COPPER (for the screening)


Working voltage: 60 V
In conformity to the requirements of the directive: 2014/35/EU

Approval marks:



• Sections and multiple table of the cores:

Code	Section mm ²	Conductor internal strand	Screening external strand	Dimension d	Dimension ±0,2 mm D
BE29-	2 x 0,35	19 x 0,16	16 x 3 x 0,10	1,3	2,7
BE20-	2 x 0,50	19 x 0,18	16 x 4 x 0,10	1,4	3,2
BE27-	2 x 0,75	19 x 0,23	16 x 6 x 0,10	1,6	3,5

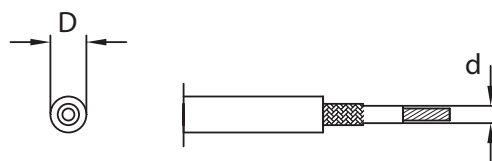

- Table of available colors:
T = transparent
N = black
B = white
- Other colours on request.

