

COAXIAL CABLES FOR LED APPLICATIONS INSULATED IN FEP + SCREENING + PVC (EXTRAFLEXIBLE)

BL2--

2013




- Type of insulation:** **FEP + SCREENING + PVC (COAXIAL - EXTRAFLEXIBLE)**
- Working temperature:** **T 70°C** for the sheath
T 150°C for the inner core
- Type of conductor:** **RED COPPER** (for the internal core)
RED COPPER (for the screening)
- Working voltage:** **60 V**
- In conformity to the requirements of the directive:** **2014/35/EU**
- Approval marks:**



- Sheath in demi-bright PVC.

- Sections and multiple table of the cores:

Code	Section mm ²	Conductor internal strand	Screening external strand	Dimension d	Dimension ±0,2 mm D
BL20-	1 x 0,50 + 1 x 0,43	130 x 0,07	16 x 7 x 0,07	1,35	2,8
BL27-	1 x 0,75 + 1 x 0,74	196 x 0,07	16 x 12 x 0,07	1,65	3,1

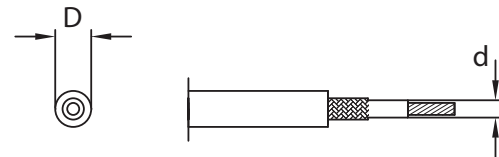

- Table of available colors:
N = black
B = white
- Other colours on request.

