

SINGLE-CONDUCTOR CABLES INSULATED IN PTFE T180°C

E0---

CE


Type of insulation: PTFE
Working temperature: T 180°C
Type of conductor: TIN-PLATED COPPER
Working voltage: 300/500 V
In conformity to the standards: DIN VDE 0250
In conformity to the requirements of the directives: 2014/35/EU
Approval marks: VDE REG. Nr.



- Sections table of the flexible conductor:

Code	Sections mm ²	Conductor strand	External diameter ±0,2 mm
E017-	0,75 mm ²	19 x 0,23	1,6
E011-	1,00 mm ²	32 x 0,20	1,8
E015-	1,50 mm ²	30 x 0,25	2,2

- Other sections on request.

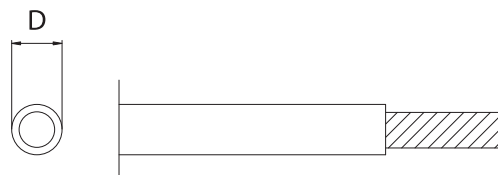

- Table of available colours:
T = transparent
B = white
L = blue
M = brown
N = black
G = yellow/green (ground cable)
 - Other colours on request.

- VDE REG. Nr. approval printing on the sheath.

Note: this kind of cables may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").

