

SINGLE-CONDUCTOR CABLES INSULATED IN PTFE + PFA OR PTFE + PTFE, DOUBLE INSULATION, T250°C

FD---

1988



FF---

1996



Type of insulation:

PTFE + PFA (for the code FD)
PTFE + PTFE (for the code FF)

Working temperature:

T 250°C

Type of conductor:

NICKEL-PLATED COPPER

Working voltage:

300/300 V

In conformity to the standards:

DIN VDE 0250

In conformity to the requirements of the directives:

2014/35/EU

Approval marks:

VDE REG. Nr.




Double insulated cable to be applied in class II fixtures.

- Double insulated cable to be applied in class II fixtures.

Code	Sections mm ²	Conductor strand	External diameter ±0,2 mm
FD10-	0,50 mm ²	19 x 0,18	1,9
FD17-	0,75 mm ²	19 x 0,23	2,1
FD11-	1,00 mm ²	32 x 0,20	2,3

- Other sections on request.

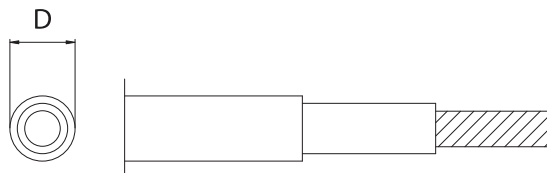

- Sections table of the flexible conductor for the code FF:

Code	Sections mm ²	Conductor strand	External diameter ±0,2 mm
FF10-	0,50 mm ²	19 x 0,18	1,9
FF17-	0,75 mm ²	19 x 0,23	2,1
FF11-	1,00 mm ²	32 x 0,20	2,3

- Other sections on request.

- Table of available colours:

T = transparent (only for the code FD)

B = white

L = blue

M = brown

N = black

- Other colours on request.

- VDE REG. Nr. approval printing on the sheath.

Note: this kind of cables may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").

