

SINGLE-CONDUCTOR CABLES INSULATED IN PTFE + PFA + PFA, TRIPLE INSULATION, T250°C



1990



Type of insulation: PTFE + PFA + PFA

Working temperature: T 250°C

Type of conductor: NICKEL-PLATED COPPER

Working voltage: 300/300 V

In conformity to the standards, with reference to the inner core: DIN VDE 0250

In conformity to the requirements of the directives: 2014/35/EU

Approval marks, of the inner core, in double insulation: VDE REG. Nr.




Triple insulated cable to be applied in class II fixtures.

- Sections table of the flexible conductor:

Code	Sections mm ²	Conductor strand	External diameter ±0,2 mm
FE17-	0,75 mm ²	19 x 0,23	2,7

- Other sections on request.

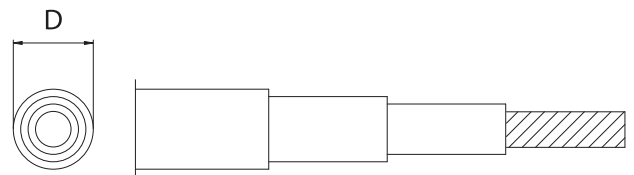

- Table of available colours:
- B** = white
- L** = blue
- M** = brown
- N** = black
- Other colours on request.

- VDE REG. Nr. approval printing, on the sheath of the inner core in double insulation.

Note: this kind of cables may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").

