

SINGLE-CONDUCTOR CABLES INSULATED IN OVERSIZED PTFE 0,6 / 1kV + PFA, DOUBLE INSULATION, T250°C

FP---

CE

Type of insulation:	"OVERSIZED" PTFE + PFA
Working temperature:	T 250°C
Type of conductor:	NICKEL-PLATED COPPER
Working voltage:	0,6/1 kV
Impulse voltage:	5 kV
In conformity to the standards:	DIN VDE 0250
In conformity to the requirements of the directives:	2014/35/EU
Approval marks:	VDE REG. Nr.




Double insulated cable to be applied in class II fixtures.

- Sections table of the flexible conductor:

Code and sezione	Sections mm ²	Conductor strand	External diameter ±0,2 mm
FP11-	1,00 mm ²	32 x 0,20	2,8
FP15-	1,50 mm ²	27 x 0,254	3,2
FP12-	2,50 mm ²	45 x 0,254	4,0

- Other sections on request.

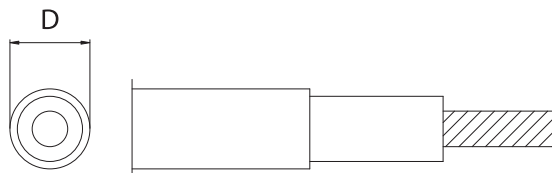

- Table of available colours:
T = transparent
N = black
 - Other colours on request.

- VDE REG. Nr. approval printing on the sheath.

Note: this kind of cables may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").

