

MULTI-CONDUCTOR CABLES INSULATED IN TRANSPARENT PTFE/PFA, DOUBLE INSULATION, + PFA T250°C

FU--T

1998

CE

Type of insulation: PTFE / PFA + PFA
Working temperature: T 250°C
Type of conductor: NICKEL-PLATED COPPER
Working voltage: 300/500 V
In conformity to the requirements of the directives: 2014/35/EU
Approval marks, of the cores in double insulation: VDE REG. Nr.



- Sections and multiple table of the cores:

Code	Sections mm ²	Conductor strand	Cores colours*	Cores position	Shape	Dimension ±0,2 mm
FUP7T	2 x 0,75	19 x 0,23	t t	P	flat	2,7 x 4,8


- Other sections and multiple on request.

* Colours table of the cores:

t = transparent

* Cores position table:

P = parallel

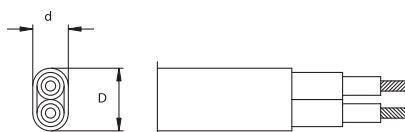

- VDE REG. Nr. approval printing on the cores in double insulation.

- Table of available colours:

T = transparent

- Other colours on request.

