

# MULTI-CONDUCTOR CABLES INSULATED IN SILICONE T180°C + PVC T90°C

**GO---**

**GA---**

CE

**Type of insulation:** SILICONE + PVC


Working temperature: T 90°C the sheath  
T 180°C the cores

Type of conductor: RED COPPER

Working voltage: 300/500 V

In conformity to the requirements of the directives: 2014/35/EU

Approval marks: C.S.v. IMQ

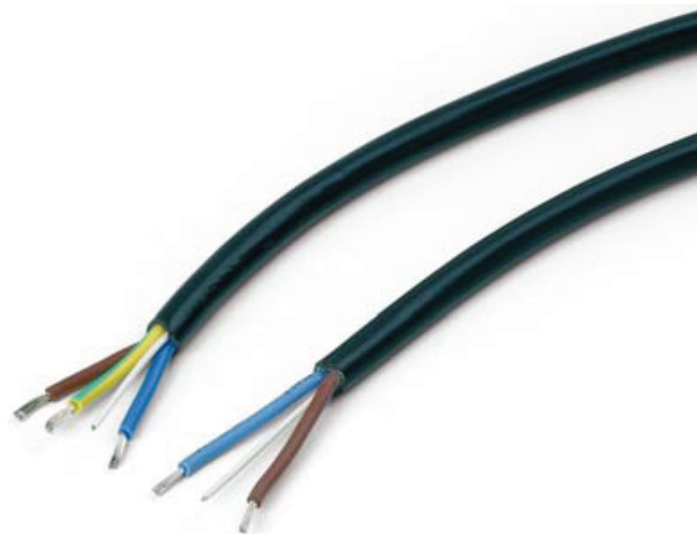

**GO---**: version without self-supporting wire rope.  
**GA---**: version with insulated steel self-supporting wire rope, with 70 kg breaking load.

- Sections and multiple table of the cores:

Code	Sections mm <sup>2</sup>	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
<b>G0P7-</b>	2 x 0,75	24x0,20	l m	flat	3,6 x 6,4
<b>G027-</b>	2 x 0,75	24x0,20	l m	round	∅ 6,4
<b>G037-</b>	3 x 0,75	24x0,20	l m g	round	∅ 6,5
<b>G021-</b>	2 x 1,00	32x0,20	l m	round	∅ 6,7
<b>G031-</b>	3 x 1,00	32x0,20	l m g	round	∅ 6,8

- Other sections on request.


- Sections and multiple table of the cores in version with steel wire rope:

Code	Sections mm <sup>2</sup>	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
<b>GA27-</b>	2 x 0,75	24x0,20	l m	round	∅ 6,6
<b>GA37-</b>	3 x 0,75	24x0,20	l m g	round	∅ 6,8

- Other sections on request.

- \* Colours table of the cores:

l = blue                      m = brown                      g = yellow/green

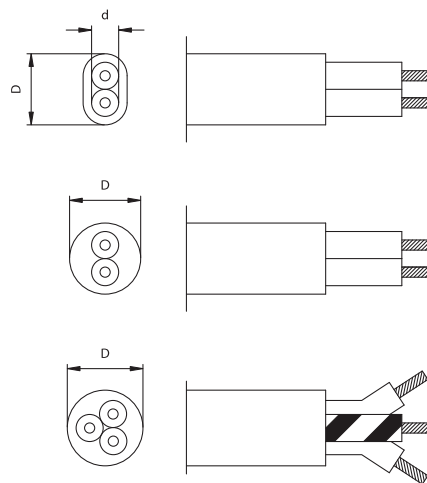

- Table of available colours:

**B** = white

**N** = black

- Other colours on request.

- C.S.v. IMQ approval printing engraved, without ink, on the sheath.

