

MULTI-CONDUCTOR CABLES INSULATED IN SILICONE T180°C + PVC T90°C

GO---

GA---

CE

Type of insulation: SILICONE + PVC


Working temperature: T 90°C the sheath
T 180°C the cores

Type of conductor: RED COPPER

Working voltage: 300/500 V

In conformity to the requirements of the directives: 2014/35/EU

Approval marks: C.S.v. IMQ

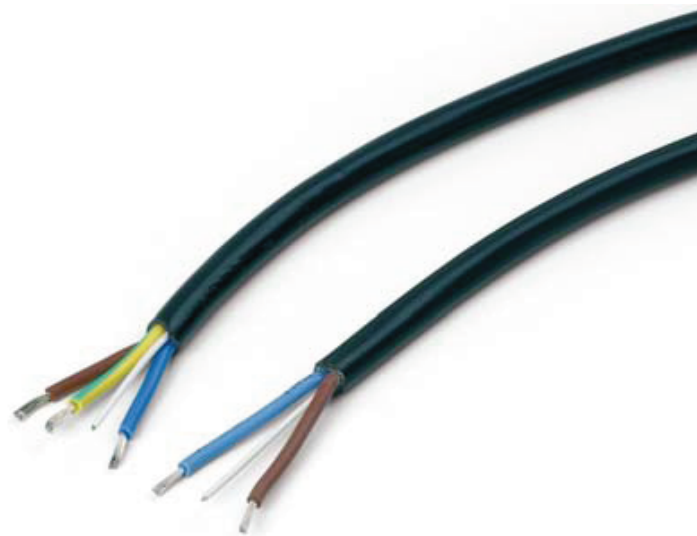

GO---: version without self-supporting wire rope.
GA---: version with insulated steel self-supporting wire rope, with 70 kg breaking load.

- Sections and multiple table of the cores:

Code	Sections mm ²	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
G0P7-	2 x 0,75	24x0,20	l m	flat	3,6 x 6,4
G027-	2 x 0,75	24x0,20	l m	round	∅ 6,4
G037-	3 x 0,75	24x0,20	l m g	round	∅ 6,5
G021-	2 x 1,00	32x0,20	l m	round	∅ 6,7
G031-	3 x 1,00	32x0,20	l m g	round	∅ 6,8

- Other sections on request.


- Sections and multiple table of the cores in version with steel wire rope:

Code	Sections mm ²	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
GA27-	2 x 0,75	24x0,20	l m	round	∅ 6,6
GA37-	3 x 0,75	24x0,20	l m g	round	∅ 6,8

- Other sections on request.

- * Colours table of the cores:

l = blue m = brown g = yellow/green

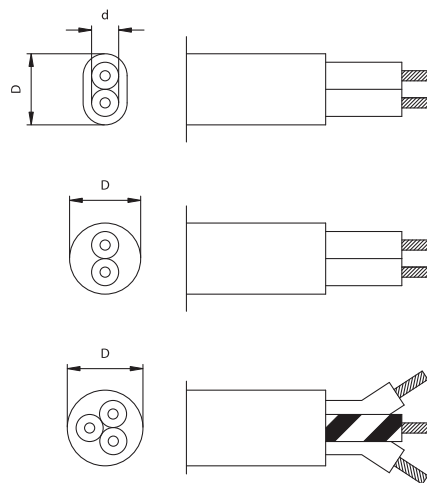

- Table of available colours:

B = white

N = black

- Other colours on request.

- C.S.v. IMQ approval printing engraved, without ink, on the sheath.

