


MULTI-CONDUCTOR CABLES INSULATED IN FEP T180°C + SILICONE T180°C

HO---

1993


CE

Type of insulation: FEP + SILICONE
Working temperature: T 180°C
Type of conductor: TIN-PLATED COPPER
Working voltage: 450/750 V
In conformity to the requirements of the directives: 2014/35/EU
Approval marks, of the cores: IEMMEQU

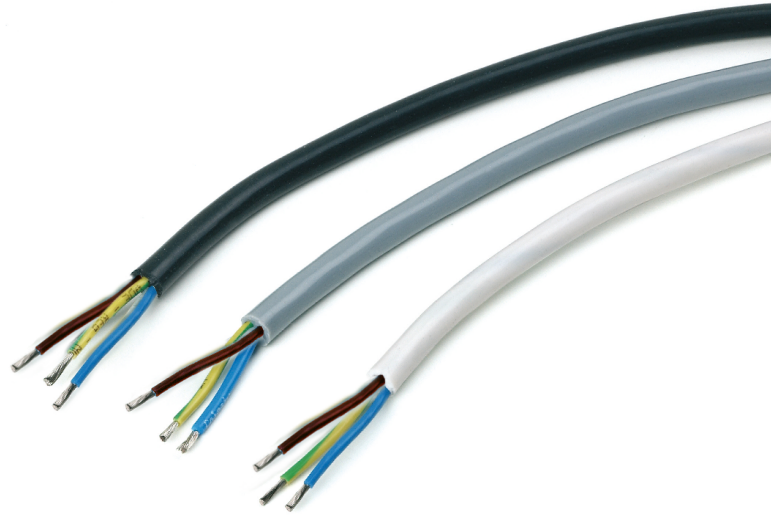

• Sections and multiple table of the cores:

Code	Sections mm ²	Conductor strand	Cores colours*	Cores position	Shape	Dimension ±0,2 mm
H027-	2 x 0,75	19 x 0,23	l m	P	round	ø 4,7
H037-	3 x 0,75	19 x 0,23	l m g	C	round	ø 5,2
H025-	2 x 1,50	19 x 0,32	l m	P	round	ø 5,9
H035-	3 x 1,50	19 x 0,32	l m g	C	round	ø 6,2

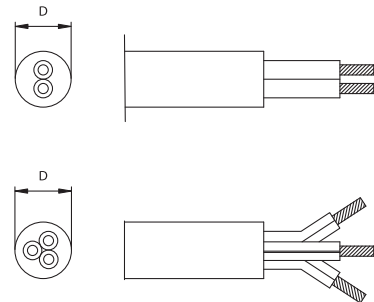

• Other sections and multiple on request.

* Table of the lines colours to identify the cores:

l = blue
 g = yellow green
 m = brown

* Cores position table:

P = parallel
 C = twisted

• IEMMEQU approval printing "FR5F" on the cores.

• Table of available colours:

N = black
B = white
E = grey
 - Other colours on request.