

MULTI-CONDUCTOR CABLES INSULATED IN TRANSPARENT PTFE/PFA, DOUBLE INSULATION, T250°C + SILICONE T180°C

HD---

2001



Type of insulation: PTFE / PFA + SILICONE

Working temperature: T 180°C for the sheath
T 250°C for the cores

Type of conductor: NICKEL-PLATED COPPER

Working voltage: 300/500 V

In conformity to the requirements of the directives: 2014/35/EU

Approval marks, of the cores in double insulation: VDE REG. Nr.



- Sections and multiple table of the cores:


| Code | Sections mm ² | Conductor strand | Cores colours* | Cores position | Shape | Dimension ±0,2 mm |
|-------|--------------------------|------------------|----------------|----------------|-------|-------------------|
| HD27- | 2 x 0,75 | 19 x 0,23 | tt | P | round | ø 5,6 |

- Other sections and multiple on request.

* Colours table of the cores:
t = transparent

Note: for the cables with coloured sheath, the polarization of the cores is given with two different colours (blue and brown).

* Cores position table:
P = parallel

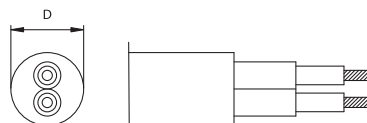

- VDE REG. Nr. approval printing on the cores in double insulation.

- Table of available colours:
T = transparent (sheath and cores)
N = black
B = white
E = grey
- Other colours on request.

