

MULTI-CONDUCTOR CABLES INSULATED IN TRANSPARENT FEP T180°C + SILICONE T180°C, EXTRAFLEXIBLE

HI--T

2001



Type of insulation: FEP + SILICONE
Working temperature: T 180°C
Type of conductor: TIN-PLATED COPPER
Working voltage: 450/750 V
In conformity to the requirements of the directives: 2014/35/EU

Approval marks, of the cores:



- Transparent sheath and cores.

Cable with the strand of the conductor which gives to the cable high flexibility.

- Sections and multiple table of the cores:

Code	Sections mm ²	Conductor strand	Cores colours*	Cores position	Shape	Dimension ±0,2 mm
HI27T	2 x 0,75	408 x 0,05	t t	P	round	ø 4,8


- Other sections on request.

* Colours table of the cores:

t = transparent

* Cores position table:

P = parallel

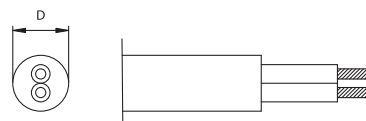

- Table of available colours:
T = transparent (sheath and cores)
 - Other colours on request.

