

SINGLE-CONDUCTOR CABLES INSULATED IN FEP T200°C UR

KO---



Type of insulation: FEP
Working temperature: T 200°C
Type of conductor: NICKEL-PLATED COPPER (*TIN-PLATED COPPER)
Working voltage: 300 V
In conformity to the standards: UL 758 AWM STYLE 1332
Approval marks: cURus




PROCESSED WIRE FILE E221012

RESPOOLED WIRE FILE E221012

• AWG table of the flexible conductor:

Code	AWG	Conductor strand	External diameter ±0,2 mm
K019-	22 AWG	7 x 0,254	1,45
K013-	20 AWG	19 x 0,203	1,7
K018-	18 AWG	19 x 0,25	1,9

• Other AWG on request.

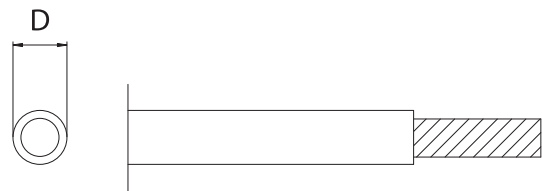

• AWG table of the solid conductor:

Code	AWG	Conductor strand	External diameter ±0,2 mm
KORC-	22 AWG *	1 x 0,64	1,4
KOR8-	18 AWG *	1 x 1,03	1,75

* TIN PLATED COPPER
 • Other AWG on request.

• cURus approval printing on the sheath.

• Table of available colours:

T = transparent*
B = white
N = black
G = green (ground cable)
 - Other colours on request.

* Note: in the cables with transparent insulation, if necessary, the cables polarization is given with the white and black printing.

Note: this kind of cables may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").

