

SINGLE-CONDUCTOR CABLES INSULATED IN FEP T150°C UR

KA---



Type of insulation: FEP
Working temperature: T 150°C
Type of conductor: TIN-PLATED COPPER
Working voltage: 300 V
In conformity to the standards: UL 758 AWM STYLE 1333
Approval marks: cURus




PROCESSED WIRE FILE E221012

RESPOOLED WIRE FILE E221012

• AWG table of the flexible conductor:

Code	AWG	Conductor strand	External diameter ±0,2 mm
KA19-	22 AWG	7 x 0,254	1,45
KA13-	20 AWG	19 x 0,203	1,65
KA18-	18 AWG	19 x 0,254	1,85

• Other AWG on request.

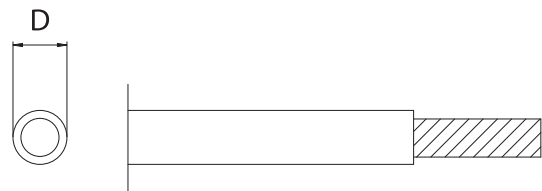

• AWG table of the solid conductor:

Code	AWG	Conductor strand	External diameter ±0,2 mm
KAR9-	22 AWG	1 x 0,64	1,4
KAR8-	18 AWG	1 x 1,03	1,75

• Table of available colours:

- N** = black
- R** = red
- Other colours on request.

• Other AWG on request.

• cURus approval printing on the sheath.

Note: this kind of cables may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").

