

SINGLE-CONDUCTOR CABLES INSULATED IN PTFE 600V T250°C UR



Type of insulation: PTFE
Working temperature: T 250°C
Type of conductor: NICKEL-PLATED or SILVER-PLATED COPPER
Working voltage: 600 V
In conformity to the standards: UL 758 AWM STYLE 1659
Approval marks: UR




PROCESSED WIRE FILE E221012

RESPOOLED WIRE FILE E221012

- AWG table of the flexible conductor:

Code	AWG	Conductor strand	External diameter ±0,2 mm
LL18-	18 AWG	19 x 0,254	2,4
LL1L-	16 AWG	19 x 0,30	2,6
LL15-	14 AWG	19 x 0,40	3,2

- Other AWG on request.

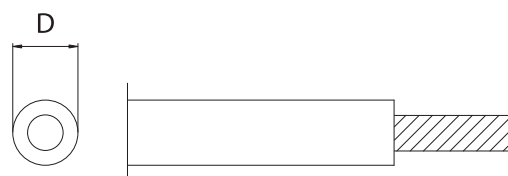

- Table of available colours:
B = white
N = black
 - Other colours on request.

- UR approval printing on the sheath.

Note: this kind of cables may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").