

# CONNECTORS PLUG AND SOCKET

## M04-

Type:

**CONNECTOR PLUG MALE + SOCKET FEMALE  
TO FIX IN PANELS WITH 1, 2, 3 AND 4 POLES**

Rated voltage:

**250 V**

Rated current:

**8 A**

Working temperature:

**T -20°C +120°C**

Type of clamps to connect the cables:

**CRIMPED**


Clamps connecting capacity:

**0,50 ÷ 1,00 mm<sup>2</sup>**

Protection degree (IP):

**IP20**

Approval marks:

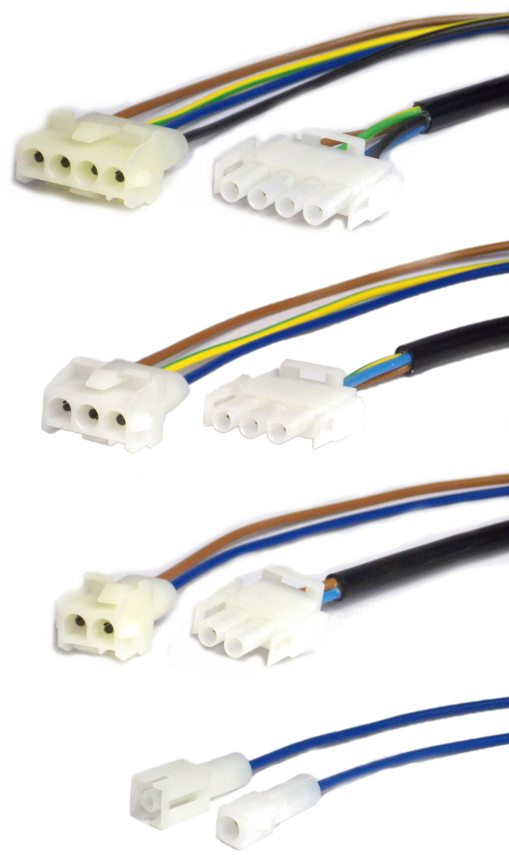

- Connection device built with plug male + socket female to fix in panels with safety retaining tooth against the accidental opening:
  - external envelope in neutral PA6 V2.
  - terminals in tin-plated brass, crimped (or to be crimped) to the supplied cables.
- Device suitable for the supply connection of lighting fixture from the power unit to the source.
- The device can be connected both with single-conductor cables and multi-conductors cables (for the cables, refer to "Section 9" of this catalogue).

- M04M1:** 1 pole male plug.
- M04F1:** 1 pole female socket.
- M04M2:** 2 poles male plug.
- M04F2:** 2 poles female socket.
- M04M3:** 3 poles male plug.
- M04F3:** 3 poles female socket.
- M04M4:** 4 poles male plug.
- M04F4:** 4 poles female socket.

• Fixing scheme:

