

PLUGS

M61-



Plug: **BIPOLAR "SCHUKO"**
2 poles

Rated voltage: **250 V**
 Rated current: **16 A C.A.**
 Insulation class: **I**

Type of clamps for cables connection: **CRIMPED CLAMPS**
 Cable exit: **AXIAL**
 Protection degree: **IP20**
 In conformity to the standards: **CEI 23-50**


Approval marks: **IMQ**
 (only for the harmonized cables)



- Tables of the cables connected to the plug:

Transparent plug version, without IMQ approval:

Insulation	Shape	Sections	Temperature	Type	cod./page
PVC + PVC TRANSPARENT	flat	2 x 0,75 mm ²	T70°C	FRDR	RSP7T (page 9057)
PVC + PVC TRANSPARENT	flat	2 x 0,75 mm ²	T70°C	FRDR	RBP7T (page 9056)
PVC + PVC TRANSPARENT	round	2 x 0,75 mm ²	T70°C	FROR	RS27T (page 9057)
FEP + PVC TRANSPARENT	flat	2 x 0,75 mm ²	T70°C (T180°C cores)	FR5FDR	BSP7T (page 9063)
FEP + PVC TRANSPARENT	round	2 x 0,75 mm ²	T70°C (T180°C cores)	FR5FOR	BS27T (page 9063)

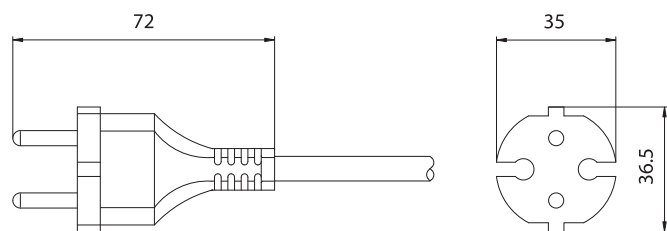

Coloured plug version, with IMQ approval:

Insulation	Shape	Sections	Temperature	Type	cod./page
PVC + PVC B - N - E	flat	2 x 0,75 mm ²	T70°C	H03WH2-F	RRP7- (page 9053)
PVC + PVC B - N - E	round	2 x 0,75 mm ²	T70°C	H03W-F	RR27- (page 9053)

- Body in injected thermoplastic PVC.
 Nickel-plated brass contacts.

- Table of the available colours:

T = transparent
B = white
N = black
E = grey
 - Other colours on request.

