

# PLUGS

## M62-

1998



Plug:

**“EUROPEAN” 2 poles**

Rated voltage:

**250 V**

Rated current:

**2,5 A**

Insulation class:

**II**

Type of clamps for cables connection:

**CRIMPED CLAMPS**

Cable exit:

**AXIAL**

Protection degree:

**IP20**

In conformity to the standards:

**EN 50075**


Approval marks:

**ENEC 03**

(for the harmonized cables)

**IMQ**


(for the transparent cables)

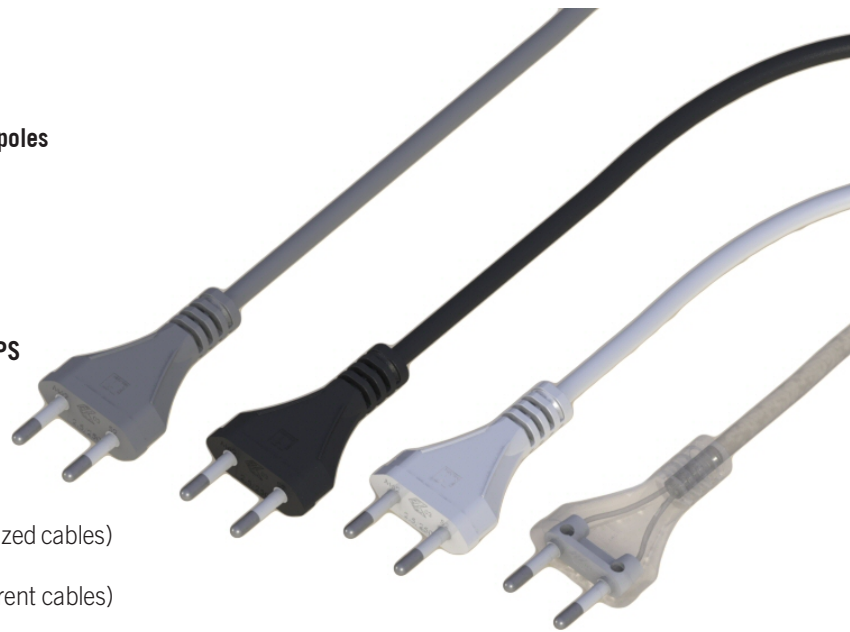

- Tables of the cables connected to the plug:

Transparent plug version, with IMQ approval:

Insulation	Shape	Sections	Temperature	Type	cod./page
PVC + PVC TRANSPARENT	flat	2 x 0,75 mm <sup>2</sup>	T70°C	FRDR	RSP7T (page 9057) RBP7T (page 9056)
PVC + PVC TRANSPARENT	round	2 x 0,75 mm <sup>2</sup>	T70°C	FROR	RS27T (page 9057) RB27T (page 9056)
FEP + PVC TRANSPARENT	flat	2 x 0,75 mm <sup>2</sup>	T70°C (T180°C cores)	FR5FDR	BSP7T (page 9063)
FEP + PVC TRANSPARENT	round	2 x 0,75 mm <sup>2</sup>	T70°C (T180°C cores)	FR5FOR	BS27T (page 9063)
FEP + PVC TRANSPARENT	round	2 x 0,75 mm <sup>2</sup>	T70°C (T180°C cores)	FR5FOR	BZ27T (page 9069)

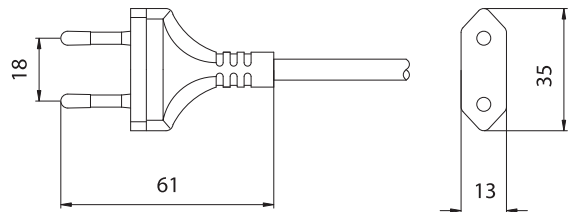

Coloured plug version, with ENEC approval:

Insulation	Shape	Sections	Temperature	Type	cod./page
PVC + PVC B - N - E	flat	2 x 0,75 mm <sup>2</sup>	T70°C	H03WH2-F	RRP7- (page 9053)
PVC + PVC B - N - E	round	2 x 0,75 mm <sup>2</sup>	T70°C	H03W-F	RR27- (page 9053)
PVC + PVC B - N - E	flat	2 x 0,75 mm <sup>2</sup>	T90°C	H03V2/2H2-F	RHP7- (page 9052)
PVC + PVC B - N - E	round	2 x 0,75 mm <sup>2</sup>	T90°C	H03V2/2-F	RH27- (page 9052)
PVC + PVC B - N - E	round	2 x 0,75 mm <sup>2</sup>	T70°C	H06W-F	RC27- (page 9055)
PVC + PVC B - N - E	flat	2 x 0,75 mm <sup>2</sup>	T70°C	H06WH2-F	RCP7- (page 9055)
RUBBER + RUBBER	round	2 x 0,75 mm <sup>2</sup>	T70°C	H05RN-F	NC27N (pag. 9048)
RUBBER + RUBBER	round	2 x 1,00 mm <sup>2</sup>	T70°C	H05RN-F	NC21N (pag. 9048)
RUBBER + RUBBER	round	2 x 1,00 mm <sup>2</sup>	T70°C	H07RN-F	NN21N (pag. 9049)

- Body in injected thermoplastic PVC.  
Nickel-plated brass contacts.

- Table of the available colours:

**T** = transparent

**B** = white

**N** = black

**E** = grey

- Other colours on request.

*Note: it is possible supply the plug with already connected cables and switches.*

