

# PLUGS

## M63-



Plug:

**“ITALIAN” THREE-POLE  
2 poles + ground**

Rated voltage:

**250 V**

Rated current:

**10 A**

Insulation class:

**I**

Type of clamps for  
cables connection:

**CRIMPED CLAMPS**

Cable exit:

**AXIAL**

Protection degree:

**IP20**


In conformity to the standards:

**CEI 23-50**

Approval marks:

**IMQ**


(only for the harmonized cables)

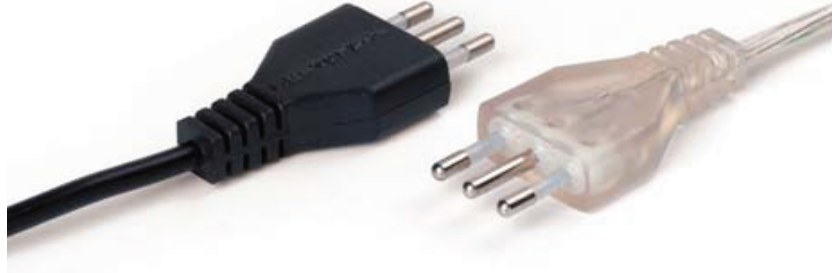

- Tables of the cables connected to the plug:

Transparent plug version, without IMQ approval:

Insulation	Shape	Sections	Temperature	Type	cod./page
PVC + PVC TRANSPARENT	round	3 x 0,75 mm <sup>2</sup>	T70°C	FROR	RS37T (page 9057)
PVC + PVC TRANSPARENT	round	3 x 0,75 mm <sup>2</sup>	T70°C	FROR	RB37T (page 9056)
FEP + PVC TRANSPARENT	round	3 x 0,75 mm <sup>2</sup>	T70°C (T180°C cores)	FR5FOR	BS37T (page 9063)

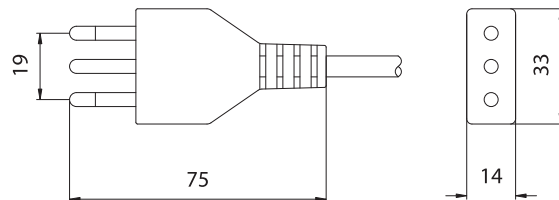

Coloured plug version, with IMQ approval:

Insulation	Shape	Sections	Temperature	Type	cod./page
PVC + PVC B - N - E	round	3 x 0,75 mm <sup>2</sup>	T70°C	H03W-F	RR37- (page 9053)
PVC + PVC B - N - E	round	3 x 0,75 mm <sup>2</sup>	T70°C	H05W-F	RC37- (page 9055)
PVC + PVC B - N - E	round	3 x 1,00 mm <sup>2</sup>	T70°C	H05W-F	RC31- (page 9055)

- Body in injected thermoplastic PVC.  
Nickel-plated brass contacts.

- Table of the available colours:

**T** = transparent

**B** = white

**N** = black

**E** = grey

- Other colours on request.

