

PLUGS

M65-

1998



Plug: **“SCHUKO”
2 poles + ground**

Rated voltage: **250 V**
Rated current: **16 A C.A.**
Insulation class: **I**

Type of clamps for cables connection: **CRIMPED CLAMPS
SQUARE (90°)**
Cable exit: **IP20**
Protection degree: **IP20**
In conformity to the standards: **CEI 23-50**

Approval marks: **IMQ**





- Tables of the cables connected to the plug:

Transparent plug version, with IMQ approval:

| Insulation | Shape | Sections | Temperature | Type | cod./page |
|--------------------------|-------|--------------------------|-------------------------|--------|----------------------|
| PVC + PVC TRANSPARENT | round | 3 x 0,75 mm ² | T70°C | FROR | RS37T (page 9057) |
| PVC + PVC TRANSPARENT | round | 3 x 0,75 mm ² | T70°C | FROR | RB37T (page 9056) |
| FEP + PVC TRANSPARENT | round | 3 x 0,75 mm ² | T70°C (T180°C cores) | FR5FOR | BS37T (page 9063) |

Coloured plug version, with IMQ approval:

| Insulation | Shape | Sections | Temperature | Type | cod./page |
|------------------------|-------|--------------------------|-------------|-----------|----------------------|
| PVC + PVC B - N - E | round | 3 x 0,75 mm ² | T70°C | H03W-F | RR37- (page 9053) |
| PVC + PVC B - N - E | round | 3 x 0,75 mm ² | T90°C | H03V2V2-F | RH37- (page 9052) |
| PVC + PVC B - N - E | round | 3 x 0,75 mm ² | T70°C | H05W-F | RC37- (page 9055) |
| PVC + PVC B - N - E | round | 3 x 1,00 mm ² | T70°C | H05W-F | RC31- (page 9055) |
| PVC + PVC B - N - E | round | 3 x 1,50 mm ² | T70°C | H05W-F | RC35- (page 9055) |
| RUBBER + RUBBER | round | 3 x 1,00 mm ² | T60°C | H07RN-F | NN31- (page 9049) |

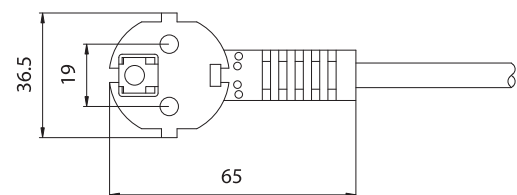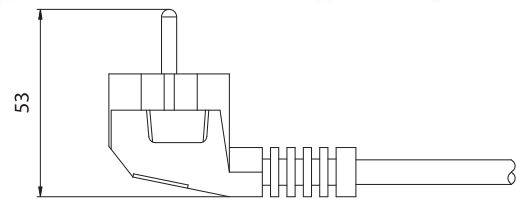

- Body in injected thermoplastic PVC.
Nickel-plated brass contacts.

- Table of the available colours:

T = transparent

B = white

N = black

E = grey

- Other colours on request.

