

PLUGS - CONNECTORS

M67-



Plug - Connector:

C13
2 POLES + GROUND

Rated voltage:

250 V

Rated current:

10 A

Insulation class:

I

Type of clamps for cables connection:

CRIMPED CLAMPS

Cable exit:

AXIAL

Protection degree:

IP20

In conformity to the standards:

IEC 60320

In conformity to the requirements of the directive:


2014/35/EU

Approval marks:



• Table of the cables connected to the plug:

Insulation	Shape	Sections	Temperature	Type	cod./page
PVC + PVC TRANSPARENT	round	3 x 0,75 mm ²	T70°C	FROR	RS37T (page 9057)
PVC + PVC TRANSPARENT	round	3 x 0,75 mm ²	T70°C	FROR	RB37T (page 9056)
FEP + PVC TRANSPARENT	round	3 x 0,75 mm ²	T70°C (T180°C cores)	FR5FOR	BS37T (page 9063)
PVC + PVC B - N	round	3 x 0,75 mm ²	T70°C	H03W-F	RR37- (page 9053)
PVC + PVC B - N	round	3 x 0,75 mm ²	T90°C	H03I/2V2-F	RH37- (page 9052)
PVC + PVC B - N	round	3 x 1,00 mm ²	T70°C	H05W-F	RC31- (page 9055)

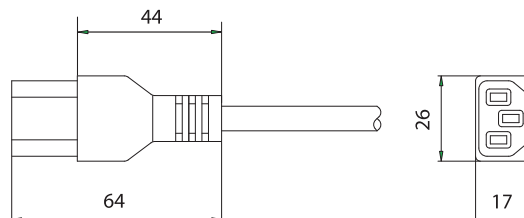

- Body in injected thermoplastic PVC.
Tin plated brass contacts.

• Table of the available colours:

T = transparent

B = white

N = black

- Other colours on request.

