

PLUGS - CONNECTORS

M68-

CE

Plug - Connector:

C7
2 poles

Rated voltage:

250 V

Rated current:

2,5 A

Insulation class:

II

Type of clamps for cables connection:

CRIMPED CLAMPS

Cable exit:

AXIAL

Protection degree:

IP20

In conformity to the standards:

IEC 60320

In conformity to the requirements of the directive:


2014/35/EU

Approval marks:



• Table of the cables connected to the plug:

Insulation	Shape	Sections	Temperature	Type	cod./page
PVC + PVC TRANSPARENT	flat	2 x 0,75 mm ²	T70°C	FRDR	RSP7T (page 9057) RBP7T (page 9056)
PVC + PVC TRANSPARENT	round	2 x 0,75 mm ²	T70°C	FROR	RS27T (page 9057) RB27T (page 9056)
FEP + PVC TRANSPARENT	flat	2 x 0,75 mm ²	T70°C (T180°C cores)	FR5FDR	BSP7T (page 9063)
FEP + PVC TRANSPARENT	round	2 x 0,75 mm ²	T70°C (T180°C cores)	FR5FOR	BS27T (page 9063)
FEP + PVC TRANSPARENT	round	2 x 0,75 mm ²	T70°C (T180°C cores)	FR5FOR	BZ27T (page 9069)
PVC + PVC B - N - E	flat	2 x 0,75 mm ²	T70°C	H03WH2-F	RRP7- (page 9053)
PVC + PVC B - N - E	round	2 x 0,75 mm ²	T70°C	H03W-F	RR27- (page 9053)
PVC + PVC B - N - E	flat	2 x 0,75 mm ²	T90°C	H03V2V2-F	RHP7- (page 9052)
PVC + PVC B - N - E	round	2 x 0,75 mm ²	T90°C	H03V2V2-F	RH27- (page 9052)
PVC + PVC B - N - E	round	2 x 0,75 mm ²	T70°C	H05W-F	RC27- (page 9055)
PVC + PVC B - N - E	flat	2 x 0,75 mm ²	T70°C	H05WH2-F	RCP7- (page 9055)

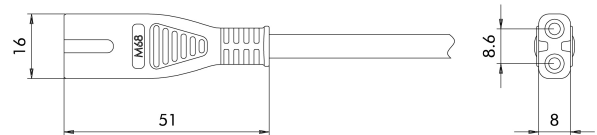

- Body in co-injected thermoplastic PVC.
Phosphorous bronze contacts.

- Table of the available colours:

T = transparent

B = white

N = black

- Other colours on request.

