

PLUGS

M76-



Plug: **"SCHUKO ANTISPLASH"**
2 poles

Rated voltage: **250 V**
 Rated current: **16 A C.A.**
 Insulation class: **II**


Type of clamps for cables connection: **CRIMPED CLAMPS**
 Cable exit: **AXIAL**
 Protection degree: **IP44**
 In conformity to the standards: **CEI 23-50**

Approval marks: **IMQ**



• Table of the cables connected to the plug:

Insulation	Shape	Sections	Temperature	Type	cod./page
RUBBER + RUBBER	round	2 x 0,75 mm ²	T60°C	H05RN-F	NC27- (page 9048)
RUBBER + RUBBER	round	2 x 1,00 mm ²	T60°C	H05RN-F	NC21- (page 9048)
RUBBER + RUBBER	round	2 x 1,00 mm ²	T60°C	H07RN-F	NN21- (page 9049)
RUBBER + RUBBER	round	2 x 1,50 mm ²	T60°C	H07RN-F	NN25- (page 9049)

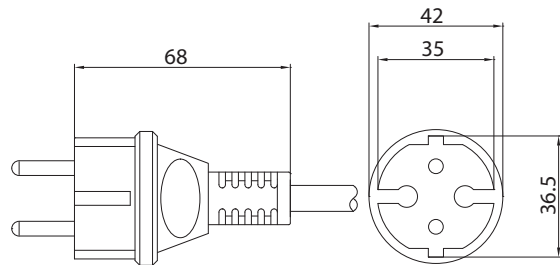

• Body in injected thermoplastic PVC.
 Nickel-plated brass contacts.

• Table of the available colours:
N = black
 - Other colours on request.

