

PUSH SWITCH SERIES "UNICO"

M90P-



Switch:

**PUSH SWITCH
FOR FLOOR LAMPS TO ADJUST DIMMER DEVICES
WITH "PUSH ON THE MAINS" CONTROL
(PULSE ON THE POWER SUPPLY)**

Rated Voltage:
Rated current:

**250 Vac
3 A through wiring
1 A push switch**

Frequency:
Environment Temperature:

**50÷60 Hz
T 35°C**

Insulation class:
Type of button:

**II
PUSH BUTTON**

Type of clamps for cables
connection:

SCREW CLAMPS

Clamps connecting capacity:

0.75 mm²

Protection grade:

IP40

In conformity to the standards:
In conformity to the requirements
of the directive:

EN 61058-2

2014/35/EU

Approval marks:

M90PN: push switch in version with black envelope


M90PB: push switch in version with white envelope

M90PE: push switch in version with grey envelope

• Table of cables connectable to the switch:

Insulation	Shape	Section mm ²	Temperature	Type	Code
PVC + PVC	round	L-IN: 2 x 0,75 L-OUT: 3 x 0,75	T70°C	H03W-F	RR27- RRT7-
PVC + PVC	round	L-IN: 2 x 0,75 L-OUT: 3 x 0,75	T90°C	H03V2V2-F	RH27- RHT7-
PVC + PVC	round	L-IN: 3 x 0,75 L-OUT: 4 x 0,75	T70°C	H03W-F	RR37- RR47-
PVC + PVC	round	L-IN: 3 x 0,75 L-OUT: 4 x 0,75	T90°C	H03V2V2-F	RH37- RH47-

The electronic switch of M90P- UNICO series can be supplied to be assembled by the customer or already provided with cables.

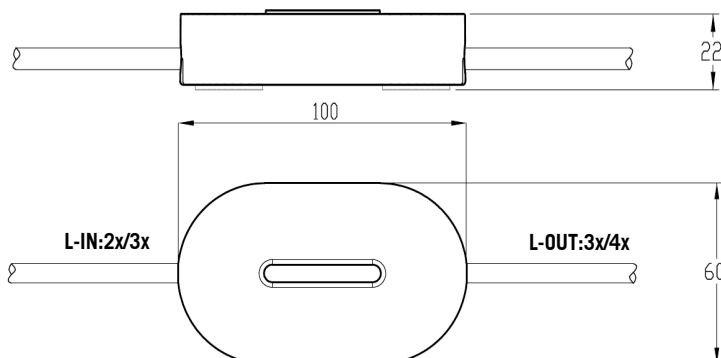

Notes:

- Rewireable push switch.
- It is possible to supply the push switch, normally open, connected to a wiring with a plug with cable length and working of the free ends according to customer's specifications.

- Envelopes in ABS.
Push button in PC.
Cable clamp bridge in PA66.
Electronic board with support in FR4.
Closing screws in zinc-plated iron.
Screw-covering plate in ABS.
Supporting pads in rubber.

