


MULTI-CONDUCTOR CABLES IN RUBBER+ RUBBER H05 T60°C

NC---


CE

Type of insulation: RUBBER + RUBBER
Working temperature: T 60°C (T 90°C ♦)
Type of conductor: RED COPPER
Working voltage: 300/500 V
Flexible cable nomenclature: H05RN-F
In conformity to the standards: EN 50525-2-21:2011
In conformity to the requirements of the directives: 2014/35/EU
Approval marks: IEMMEQU - <HAR>

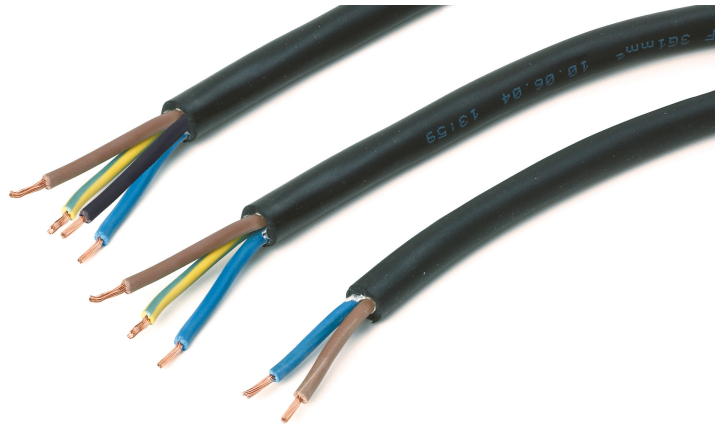

• Sections and multiple table of the cores:

Code	Sections mm ²	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
NC27N	2 x 0,75	24 x 0,20	l m	round	ø 6,2
NC37N	3 x 0,75	24 x 0,20	l m g	round	ø 6,7
NCT7N	3 x 0,75	24 x 0,20	l m n	round	ø 6,7
NC47N	4 x 0,75	24 x 0,20	l m n g	round	ø 7,3
NCQ7N	4 x 0,75	24 x 0,20	l m n e	round	ø 7,3
NC21N	2 x 1,00	32 x 0,20	l m	round	ø 6,8
NC31N	3 x 1,00	32 x 0,20	l m g	round	ø 7,2
NCT1N	3 x 1,00	32 x 0,20	l m n	round	ø 7,2
NC41N	4 x 1,00	32 x 0,20	l m n g	round	ø 7,8
NCQ1N	4 x 1,00	32 x 0,20	l m n e	round	ø 7,8

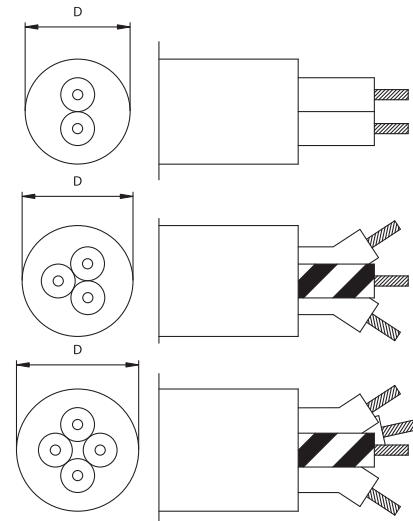

• Other sections and multiple on request.

* Colours table of the cores:

l = blue m = brown n = black
 e = grey g = yellow/green

- ♦ T90°C for applications subject to EN60598-1.
- IEMMEQU -<HAR>approval printing on the sheath.

- Table of available colours:
N = black
 - Other colours on request.

