

MULTI-CONDUCTOR CABLES INSULATED IN "OVERSIZE" SILICONE, 0,6 / 1kV, T180°C + RUBBER PCP T70°C

ND---

2004

CE

Type of insulation:

"OVERSIZE" SILICONE + RUBBER PCP (polychloroprene)

Working temperature:

T 70°C (T 90°C ♦) for the sheath
T 180°C for the cores

Type of conductor:

TIN-PLATED COPPER

Working voltage:

0,6/1 kV

Impulse voltage:


5 kV

In conformity to the requirements of the directives:

2014/35/EU

Approval marks, of the cores:

VDE REG. Nr.

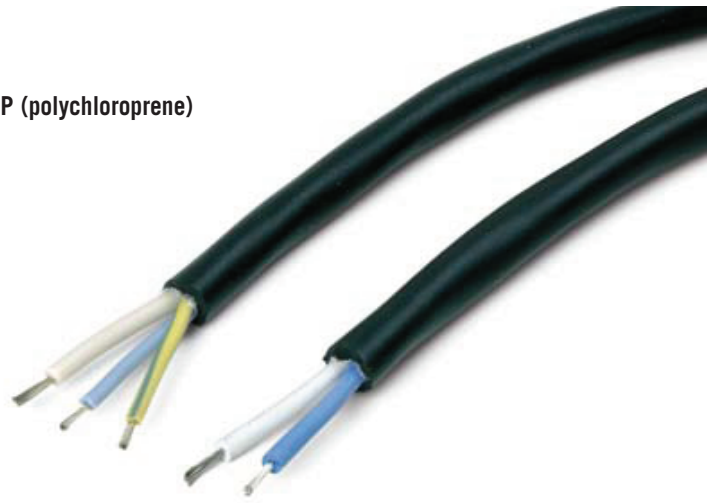

• Sections and multiple table of the cores:


Code	Sections mm ²	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
ND21N	2 x 1,00	32 x 0,20	l m	round	∅ 9,1
ND31N	3 x 1,00	32 x 0,20	l m g	round	∅ 9,2

• Other sections on request.

* Colours table of the cores:

l = blue m = brown g = yellow/green

♦ T90°C for applications subjected to EN60598.

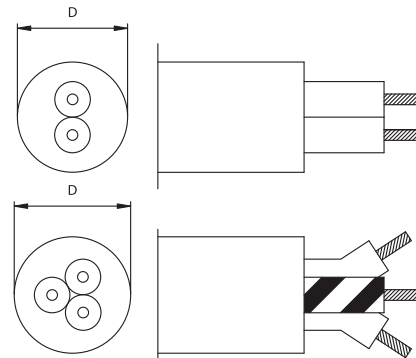

• VDE REG. Nr. approval printing on the cores under the external sheath.

• Table of available colours:

N = black

- Other colours on request.

