

# MULTI-CONDUCTOR CABLES INSULATED IN PTFE T250°C + RUBBER PCP T70°C

**NF---**

1996

CE

**Type of insulation:** PTFE + RUBBER PCP (polychloroprene)

Working temperature: **T 70°C** (T 90°C ♦) for the sheath  
**T 250°C** for the cores

Type of conductor: **NICKEL-PLATED**  
Working voltage: **300/300 V**

In conformity to the requirements of the directives: **2014/35/EU**

Approval marks, of the cores: **VDE REG. Nr.**



- Sections and multiple table of the cores:


Code	Sections mm <sup>2</sup>	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
<b>NF21N</b>	2 x 1,00	32 x 0,20	l m	round	ø 6,4
<b>NF31N</b>	3 x 1,00	32 x 0,20	l m g	round	ø 6,8
<b>NF25N</b>	2 x 1,50	32 x 0,25	l m	round	ø 7,0

- Other sections on request.

\* Colours table of the cores:

l = blue                      m = brown                      g = yellow/green

- ♦ T90°C for applications subjected to EN60598.

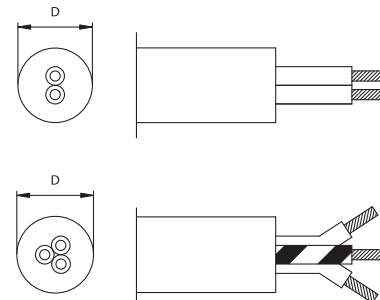

- VDE REG. Nr. approval printing on the cores under the external sheath.

- Table of available colours:  
**N** = black  
- Other colours on request.