

# MULTI-CONDUCTOR CABLES INSULATED IN RUBBER+ RUBBER H07 T60°C

**NN---**  
**NH---**



**Type of insulation:** RUBBER + RUBBER

**Working temperature:** T 60°C (T 90°C ♦)

**Type of conductor:** RED COPPER


**Working voltage:** 450/750 V

**Cable nomenclature:** H07RN-F (for codes NN---)  
H07RN8-F (for codes NH---)

**In conformity to the standards:** EN 50525-2-21:2012

**In conformity to the requirements of the directives:** 2014/35/EU

**Approval marks:** IEMMEQU - <HAR>

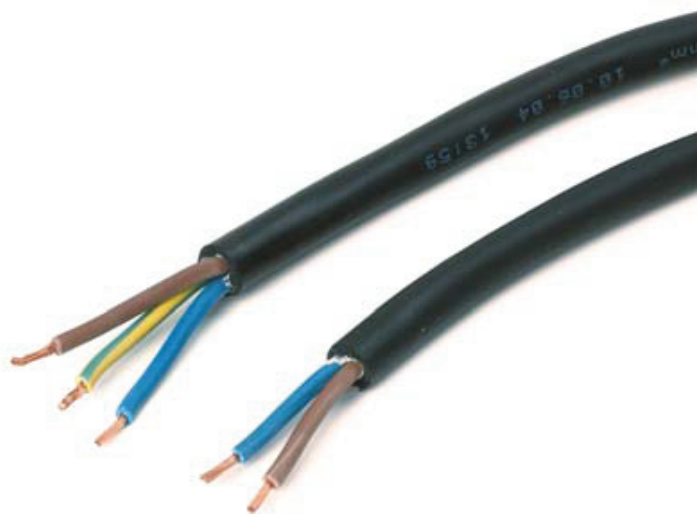

**NN---**: cable with external sheath in “standard” rubber  
H07RN-F.

**NH---**: cable with external sheath in rubber  
H07RN8-F.

• Sections and multiple table of the cores:

Code	Sections mm <sup>2</sup>	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
<b>NN21N</b>	2 x 1,00	32 x 0,20	l m	round	∅ 8,3
<b>NN31N</b>	3 x 1,00	32 x 0,20	l m g	round	∅ 8,9
<b>NN41N</b>	4 x 1,00	32 x 0,20	l m n g	round	∅ 10,0
<b>NN25N</b>	2 x 1,50	30 x 0,25	l m	round	∅ 9,3
<b>NN35N</b>	3 x 1,50	30 x 0,25	l m g	round	∅ 10,0
<b>NN45N</b>	4 x 1,50	30 x 0,25	l m n g	round	∅ 11,0


• Other sections on request.

\* Colours table of the cores:

l = blue                      m = brown                      g = yellow/green  
n = black

♦ T90°C for applications subject to EN60598-1.

• IEMMEQU -<HAR> approval printing on the sheath.

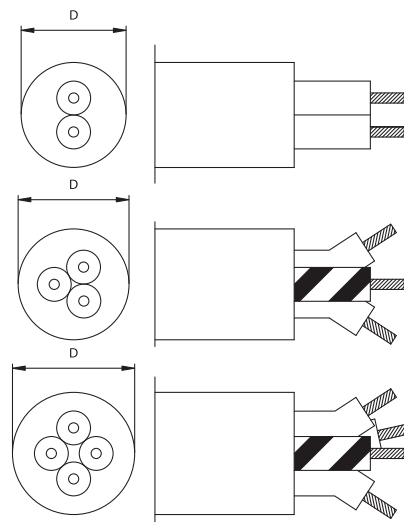

• Table of available colours:

**N** = black

- Other colours on request.

