

MULTI-CONDUCTOR CABLES INSULATED IN "OVERSIZE" PTFE, 0,6 / 1kV, T250°C + RUBBER PCP T70°C

NM---

2003

CE

Type of insulation: "OVERSIZE" PTFE + RUBBER PCP (polychloroprene)

Working temperature: T 70°C (T 90°C ♦) for the sheath
T 250°C for the cores

Type of conductor: NICKEL-PLATED
Working voltage: 0,6/1 kV
Impulse voltage: 5 kV

In conformity to the requirements of the directives: 2014/35/EU

Approval marks, of the cores: VDE REG. Nr.




- Sections and multiple table of the cores:

Code	Sections mm ²	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
NM31N	3 x 1,00	32 x 0,20	t l g	round	ø 7,4

- Other sections on request.

* Colours table of the cores:
t = transparent l = blue g = yellow/green

- ♦ T90°C for applications subjected to EN60598.

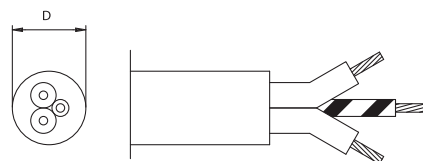

- VDE REG. Nr. approval printing on the cores under the external sheath.

- Table of available colours:
N = black
- Other colours on request.