

MULTI-CONDUCTOR CABLES INSULATED IN SILICONE T180°C + RUBBER T70°C

NS---

2004

CE

Type of insulation:

SILICONE + RUBBER

Working temperature:

**T 70°C (T 90°C ♦) for the sheath
T 180°C for the cores**

Type of conductor:

TIN-PLATED COPPER

Working voltage:


450/750 V

In conformity to the requirements
of the directives:

2014/35/EU

Approval marks,
of the cores:

VDE REG. Nr.

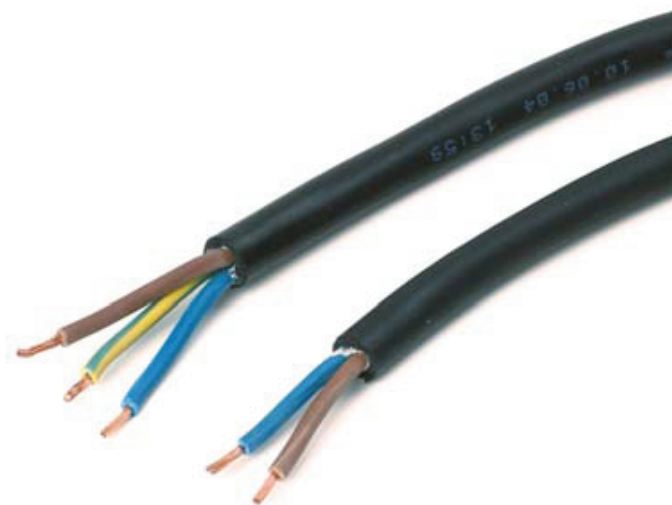

• Sections and multiple table of the cores:

Code	Sections mm ²	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
NS21N	2 x 1,00	32 x 0,20	l m	round	ø 8,3
NS31N	3 x 1,00	32 x 0,20	l m g	round	ø 8,9
NS25N	2 x 1,50	30 x 0,25	l m	round	ø 9,3
NS35N	3 x 1,50	30 x 0,25	l m g	round	ø 10,0

• Other sections on request.


* Colours table of the cores:

l = blue

m = brown

g = yellow/green

♦ T90°C for applications subjected to EN60598.

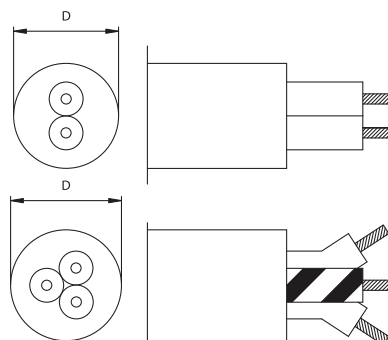

• VDE REG. Nr. approval printing on the cores under the
external sheath.

• Table of available colours:

N = black

- Other colours on request.

