

# MULTI-CONDUCTOR CABLES FOR LEDs APPLICATIONS INSULATED IN FEP + RUBBER

**NT---**

2008



**Type of insulation:** **FEP + RUBBER**

Working temperature: **T 70°C** (T 90°C ♦) for the sheath  
**T 180°C** for the cores

Type of conductor: **TIN-PLATED COPPER**

Working voltage: **300/500 V**

In conformity to the requirements of the directive: **2014/35/EU**

Approval marks:



- RECOMMENDED FOR OUTDOOR USE

- Sections and multiple table of the cores:


Code	Sections mm <sup>2</sup>	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
<b>NT20N</b>	2 x 0,50	19 x 0,18	r n	round	ø 5,3
<b>NTQ0N</b>	4 x 0,50	19 x 0,18	r n l b	round	ø 5,8
<b>NTE0N</b>	6 x 0,50	19 x 0,18	r n l v b e	round	ø 6,9
<b>NT60N</b>	6 x 0,50	19 x 0,18	r r/n l l/n b b/n	round	ø 6,9

- Other sections on request.

- \* Colours table of the cores:

r = red                      n = black                      l = blue  
v = green                    e = grey                      r/n = red+black  
l/n = blue+black          b/n = green+black          b = white

- ♦ T90°C for applications subjected to EN60598.

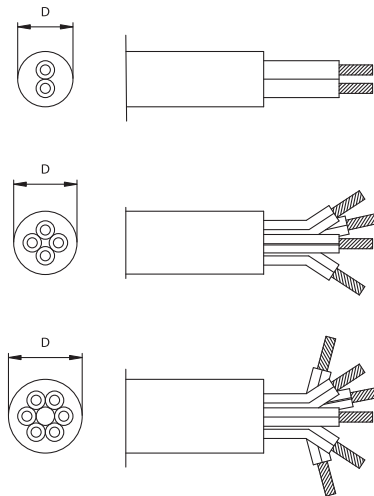

- Table of available colours:

**N** = black

- Other colours on request.

