

EDISON SCREW LAMPHOLDERS

P03E

Attention: cap is under tension, therefore the lampholder has connected polarized cables: the black cable (line) is connected to the central contact; the white cable (neutral) is connected to the cap.

Lampholder:

E17


Rated current:
Rated voltage:
Working temperature:
Connected cables
working temperature:
In conformity to the standards:

2 A
250 V
T 250°C
T 105°÷ 250°C
UL 496

Approval marks:

- Porcelain body.
Cap-side-contact in nickel-plated brass.
Central contact in nickel-plated brass.
Pressure spring in normalized stainless steel.
- Weight of the lampholder in standard execution (with cables L = 25 cm): 35 g.

- Instructions to fix the lampholder on structures.

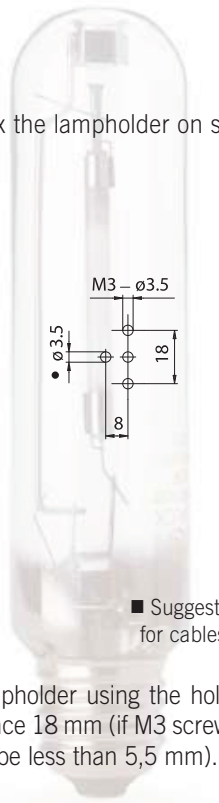

■ Suggested minimum dimension for cables passage (if necessary)

- Fixing of the lampholder using the holes diameter 3,5 mm with center distance 18 mm (if M3 screws are used, the head diameter should be less than 5,5 mm).

Single-conductor flexible connecting cables, polarised white and black, crimped to the lampholder:


Insulation	T in °C	Conduct.	Available voltages and AWG		
			300V	600V	18AWG
Silicone Single insulation	200	CuSn		•	•
Silicone+glass-braid Single insulation	200	CuSn		•	•
FEP Single insulation	200	CuNi	•	•	•
FEP+FEP Double insulation	200	CuNi	•		•
PTFE Single insulation	250	CuNi	•	•	•
PTFE+PFA Double insulation	250	CuNi	•		•

- The accessories available are listed at the end of this section.



P03E

1985

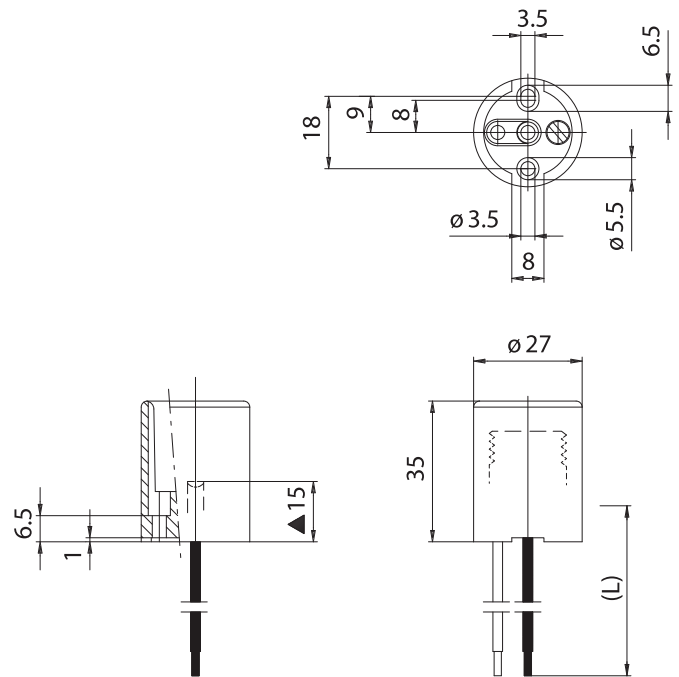

▲ Central contact distance