


# P10 750V



<b>Lampholder:</b>	<b>E27</b>
Rated voltage:	<b>500 V</b>
Impulse voltage:	<b>5 kV</b>
Rated current:	<b>4 A</b>
Working temperature:	<b>T 210°C</b>
Type of clamps for cables connection:	<b>SCREW CLAMPS</b>
Clamps connecting capacity:	<b>0,50 ÷ 1,00 mm<sup>2</sup></b>
Overvoltage category:	<b>III</b>
Protection degree (IP):	<b>IP20</b>
In conformity to the standards:	<b>EN 60238</b>
In conformity to the requirements of the directive:	<b>2006/95/EC</b>
Approval marks:	<b>ENEC 10</b>



**P10 750VA:** P10 750V lampholder with anti-vibrations device.

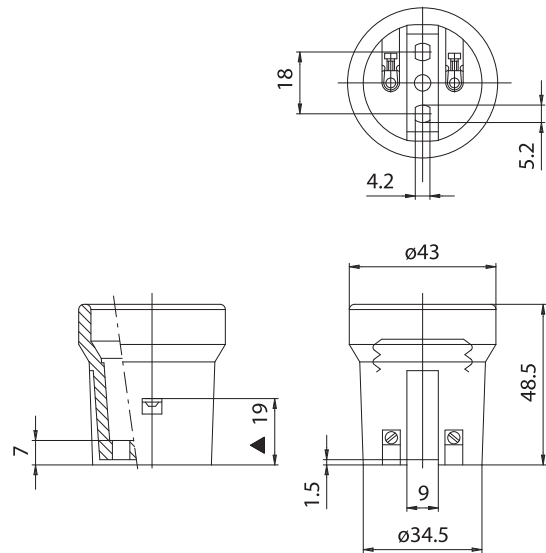

- The accessories available are listed at the end of this section.

▲ Central contact distance



# EDISON SCREW LAMPHOLDERS


Note: to tighten the clamps screws, use a screwdriver with a slot max diameter 3,5 mm.

**This lampholder is not manufactured by E.M.C. Colosio.**

- Porcelain body.  
Phosphorous bronze contacts.  
Central contact pressure spring in normalized stainless steel.  
Brass clamps with slot screws not completely tightened.  
Cap in nickel-plated iron.

- Weight: 60 g.

- Instructions to fix the lampholder on structures.

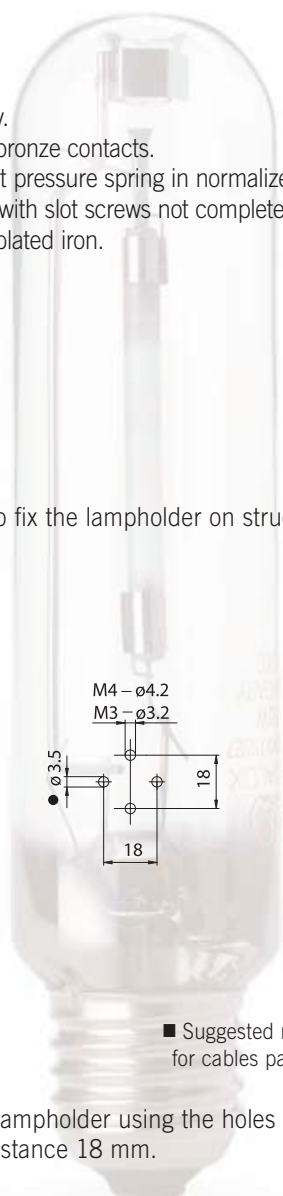

■ Suggested minimum dimension for cables passage (if necessary)

- Fixing of the lampholder using the holes diameter 3,2 mm with center distance 18 mm.

