

EDISON SCREW LAMPHOLDERS


P10M

Note: to tighten the clamps screws, use a screwdriver with a slot max diameter 3,5 mm.

This lampholder is not manufactured by E.M.C. Colosio.

- Porcelain body.
Phosphorous bronze contacts.
Central contact pressure spring in normalized stainless steel.
Brass clamps with slot screws not completely tightened.
Cap in nickel-plated iron.
- Weight: 60 g.

- Instructions to fix the lampholder on structures.



■ Suggested minimum dimension for cables passage (if necessary)

- Fixing of the lampholder using the holes diameter 3,2 mm with center distance 18 mm.

Lampholder:

E26

Maximum power:

660 W

Rated voltage:

250 V

Working temperature:

T 250°C

Type of clamps for

cables connection:

SCREW CLAMPS

Clamps connecting capacity:

18 AWG

In conformity to the standards:

UL 496

CSA 22.2 N.43

Approval marks:

cURus

Attention: connect the line cable, usually the black one, to the central contact clamp and the neutral cable, usually the white one, to the lateral contact clamp.

Single-conductor flexible connecting cables polarized white and black, which could be connected to the lampholder (arranged with crimped end-terminals or with stripping 6 mm)

Insulation	T in °C	Conduct.	Available voltages and AWG		
			300V	600V	18AWG
Silicone <i>Single insulation</i>	200	CuSn		•	•
Silicone+glass-braid <i>Single insulation</i>	200	CuSn		•	•
FEP <i>Single insulation</i>	200	CuNi	•	•	•
FEP+FEP <i>Double insulation</i>	200	CuNi	•		•
PTFE <i>Single insulation</i>	250	CuNi	•	•	•
PTFE+PFA <i>Double insulation</i>	250	CuNi	•		•



P10

CE


Lampholder:

Rated voltage:
Rated current:
Working temperature:
Type of clamps for
cables connection:
Clamps connecting capacity:
Overvoltage category:
Protection degree (IP):
In conformity to the standards:
In conformity to the requirements
of the directive:

E27
500 V
4 A
T 270°C
SCREW CLAMPS
0,50 ÷ 1,00 mm²
III
IP20
EN 60238
2014/35/EU

Approval marks:

ENEC 03

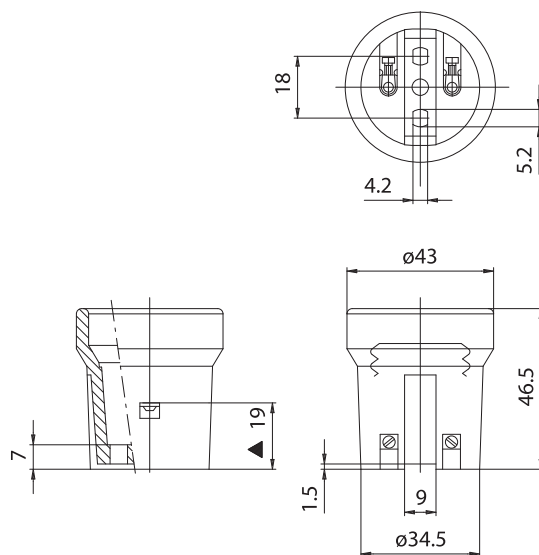

- The accessories available are listed at the end of this section.

▲ Central contact distance

