

FOR VERY LOW TENSION 12 - 24V

P70-

1988




Lampholder: G4
Rated voltage: 24 V
Rated current: 4 A
Working temperature: T 240°C
Connected cables working temperature: T 90°÷ 250°C
Protection grade: IP20
In conformity to the standards: EN 60838-1
Approval marks: CQC



P70: standard version.
P70S: version with envelope without ears.
P70D: version with "oversize" envelope.

Single-conductor flexible connecting cables crimped to the lampholder:

Insulation	T in °C	Conduct.	Available sections in mm ²			
			0,50	0,75	1,00	1,50
Silicone <i>Single insulation</i>	180	CuSn	•	•	•	•
Silicone+glass-braid <i>Single insulation</i>	180	CuSn	•	•	•	•
FEP <i>Single insulation</i>	180	CuSn	•	•	•	•
PTFE <i>Single insulation</i>	180	CuSn	•	•	•	•
PTFE <i>Single insulation</i>	250	CuNi	•	•	•	•
PFA <i>Single insulation</i>	260	CuNi	•	•	•	•

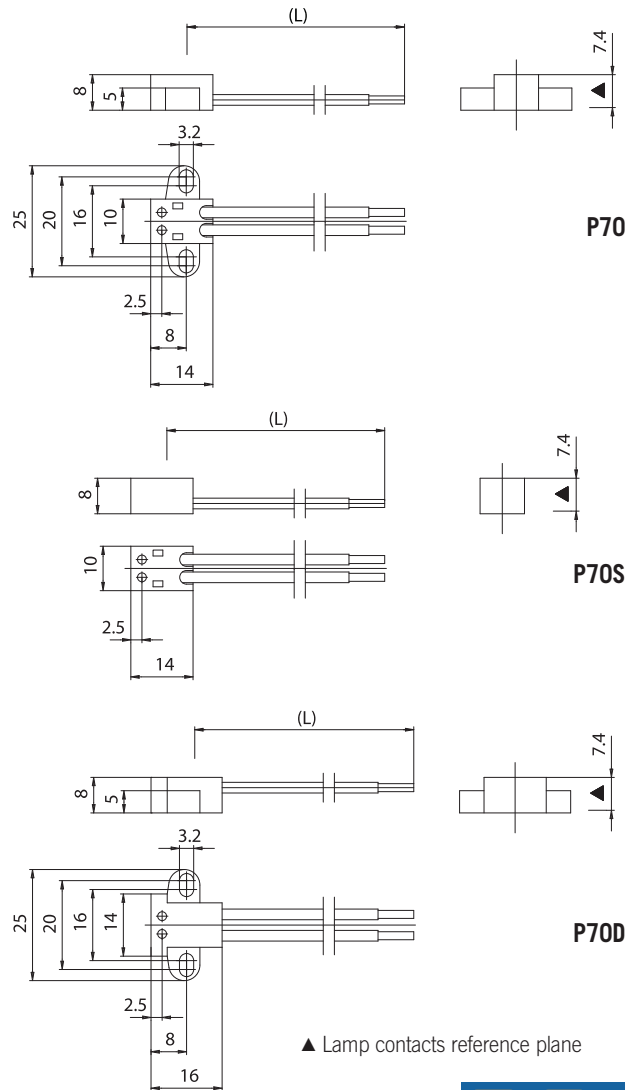

LAMPHOLDER FOR INCANDESCENT HALOGEN LAMPS

P70-




Lampholder:	G4
Rated current:	4 A
Rated voltage:	24 V
Working temperature:	T 200°C
Connected cables working temperature:	T 105°÷ 250°C
In conformity to the standards:	UL 496 CSA 22.2 N.43
Approval marks:	cURus

- Black PPS body
with standard envelope for version P70,
with “oversize” envelope for version P70D,
with envelope without ears P70S.
Double contacts in special alloy.
- Weight of the lampholder in standard execution
(with cables L = 15 cm): 5 g.

Single-conductor flexible connecting cables crimped to the lampholder:

Insulation	T in °C	Conduct.	Available voltage and AWG		
			300V	600V	18AWG
Silicone <i>Single insulation</i>	200	CuSn		•	•
Silicone+glass-braid <i>Single insulation</i>	200	CuSn		•	•
FEP <i>Single insulation</i>	200	CuNi	•	•	•
PTFE <i>Single insulation</i>	250	CuNi	•	•	•

- Indications to fix the lampholder on structures.

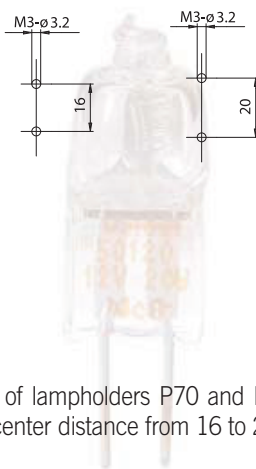

- Eventual fixing of lampholders P70 and P70D by slots, width 3,2 mm, with center distance from 16 to 20 mm.

Attention: in the end product the cables connected to this lampholder should not be accessible during the normal replacement operations of the lamp (if accessible a cord-grip device should be provided).

