

FOR VERY LOW TENSION 12 - 24V

P75

1986

Clamp lampholder for lamp with base:

G4 - GZ4 - G5.3 - GX5.3 - GU5.3
G6.35 - GY6.35 - GZ6.35

Rated voltage:

24 V

Rated current:

10 A

Working temperature:

T 350°C

Connected cables

working temperature:

T 90° ÷ 250°C

Protection grade:





IP20






P75R: version with white zinc-plated zamak adapter with threaded hole M10 x1.

Single-conductor flexible cables to be connected to the lampholder:
(Suggested arrangement with crimped end-terminal):

Insulation	T in °C	Conduct.	Available sections in mm ²			
			0,50	0,75	1,00	1,50
Silicone <i>Single insulation</i>	180	CuSn	•	•	•	•
Silicone+glass-braid <i>Single insulation</i>	180	CuSn	•	•	•	•
FEP <i>Single insulation</i>	180	CuSn	•	•	•	•
PTFE <i>Single insulation</i>	180	CuSn	•	•	•	•
PTFE <i>Single insulation</i>	250	CuNi	•	•	•	•
PFA <i>Single insulation</i>	260	CuNi	•	•	•	•



P75



P75R

● Thread depth




LAMPHOLDER FOR INCANDESCENT HALOGEN LAMPS

Note: to tighten the clamps screws use a screwdriver with slot max. diameter 3,5 mm.

- Steatite body.
Brass clamp-contacts.
Connection screws in zinc-plated iron with slot head.
(White zinc-plated zamak adapter M10 x1 for art. P75R).

- Weight of the lampholder in standard execution: 5 g.

- Indications to fix P75 lampholder on structures.

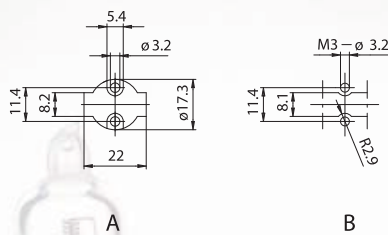

A - Front fixing B - Back fixing

■ Suggested minimum dimension for cables passage

- Lampholder fixing by holes diameter 3,2 mm, with center distance 11,4 mm (if M3 screws are used, the diameter of the screw head must be less than 5,5 mm).

