

SINGLE-CONDUCTOR CABLES INSULATED IN SILICONE WITH FIBERGLASS-BRAID T200°C UR

Q0---



Type of insulation: SILICONE WITH FIBERGLASS-BRAID
Working temperature: T 200°C
Type of conductor: TIN-PLATED COPPER
Working voltage: 600 V
In conformity to the standards: UL 758 AWM STYLE 3071
Approval marks: UR




PROCESSED WIRE FILE E221012

RESPOOLED WIRE FILE E221012

• AWG table of the flexible conductor:

Code	AWG	Conductor strand	External diameter ±0,2 mm
Q018-	18 AWG	7 x 0,40	3,2
Q01L-	16 AWG	11 x 0,40	3,7
Q015-	14 AWG	17 x 0,40	4,1

• Other AWG on request.

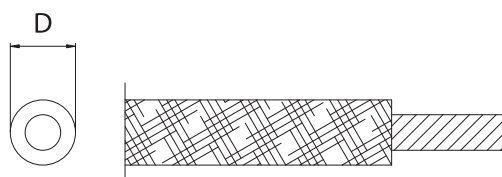

• Table of available colours:

- B** = white
- N** = black
- G** = yellow/green (ground cable)
- Other colours on request.

• UR approval printing on the sheath.

Note: this kind of cables may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").

