


MULTI-CONDUCTOR CABLES INSULATED IN PVC + PVC H05 T70°C

RC---

CE

Type of insulation: PVC + PVC
Working temperature: T 70°C
Type of conductor: RED COPPER
Working voltage: 300/500 V
Cable nomenclature: H05VV-F
In conformity to the standards: EN 50525-2-11: 2011
In conformity to the requirements of the directives: 2014/35/EU
Approval marks: IEMMEQU - <HAR>

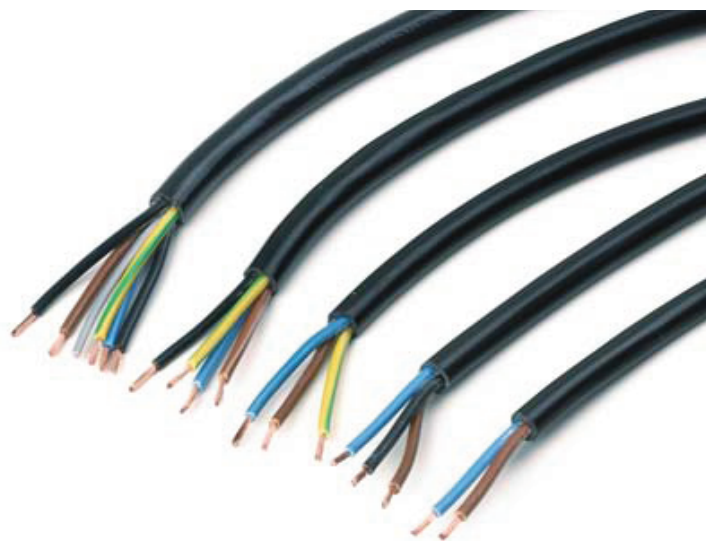

- Sections and multiple table of the cores:


Code	Sections mm ²	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
RC27-	2 x 0,75	24 x 0,193	l m	round	ø 6,3
RC37-	3 x 0,75	24 x 0,193	l m g	round	ø 6,7
RC7-	3 x 0,75	24 x 0,193	l m n	round	ø 6,7
RC47-	4 x 0,75	24 x 0,193	l m n g	round	ø 7,3
RCQ7-	4 x 0,75	24 x 0,193	l m n e	round	ø 7,3
RC57-	5 x 0,75	24 x 0,193	l m n e g	round	ø 8,2
RCC7-	5 x 0,75	24 x 0,193	l m n e r	round	ø 8,2
RC21-	2 x 1,00	32 x 0,193	l m	round	ø 6,6
RC31-	3 x 1,00	32 x 0,193	l m g	round	ø 7,0
RC71-	3 x 1,00	32 x 0,193	l m n	round	ø 7,0
RC41-	4 x 1,00	32 x 0,193	l m n g	round	ø 7,9
RCQ1-	4 x 1,00	32 x 0,193	l m n e	round	ø 7,9
RC51-	5 x 1,00	32 x 0,193	l m n e g	round	ø 8,6
RCC1-	5 x 1,00	32 x 0,193	l m n e r	round	ø 8,6
RC25-	2 x 1,50	28 x 0,245	l m	round	ø 7,6
RC35-	3 x 1,50	28 x 0,245	l m g	round	ø 8,3
RC45-	4 x 1,50	28 x 0,245	l m n g	round	ø 9,2
RC55-	5 x 1,50	28 x 0,245	l m n e g	round	ø 10,4

- Other sections on request.

* Colours table of the cores:

l = blue m = brown g = yellow/green
n = black e = grey r = red

- IEMMEQU - <HAR> approval printing engraved, without ink, on the sheath.

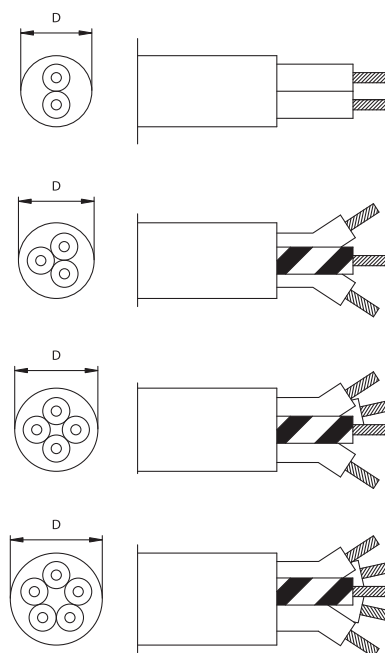

- Table of available colours:

N = black
B = white
E = grey
- Other colours on request.