

MULTI-CONDUCTOR CABLES INSULATED IN PVC + PVC H05 T90°C

RF---


CE

Type of insulation: PVC + PVC
Working temperature: T 90°C
Type of conductor: RED COPPER
Working voltage: 300/500 V
Cable nomenclature: H05V2V2-F
In conformity to the standards: EN 50525-2-1: 2011
In conformity to the requirements of the directives: 2014/35/EU
Approval marks: IEMMEQU - <HAR>



• Sections and multiple table of the cores:

Code	Sections mm ²	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
RF27-	2 x 0,75	24 x 0,193	l m	round	ø 6,3
RF37-	3 x 0,75	24 x 0,193	l m g	round	ø 6,7
RFT7-	3 x 0,75	24 x 0,193	l m n	round	ø 6,7
RF47-	4 x 0,75	24 x 0,193	l m n g	round	ø 7,3
RFQ7-	4 x 0,75	24 x 0,193	l m n e	round	ø 7,3
RF57-	5 x 0,75	24 x 0,193	l m n e g	round	ø 8,2
RFC7-	5 x 0,75	24 x 0,193	l m n e r	round	ø 8,2
RF21-	2 x 1,00	32 x 0,193	l m	round	ø 6,6
RF31-	3 x 1,00	32 x 0,193	l m g	round	ø 7,0
RFT1-	3 x 1,00	32 x 0,193	l m n	round	ø 7,0
RF41-	4 x 1,00	32 x 0,193	l m n g	round	ø 7,9
RFQ1-	4 x 1,00	32 x 0,193	l m n e	round	ø 7,9
RF51-	5 x 1,00	32 x 0,193	l m n e g	round	ø 8,6
RFC1-	5 x 1,00	32 x 0,193	l m n e r	round	ø 8,6
RF25-	2 x 1,50	28 x 0,245	l m	round	ø 7,6
RF35-	3 x 1,50	28 x 0,245	l m g	round	ø 8,3
RF45-	4 x 1,50	28 x 0,245	l m n g	round	ø 9,2
RF55-	5 x 1,50	28 x 0,245	l m n e g	round	ø 10,4

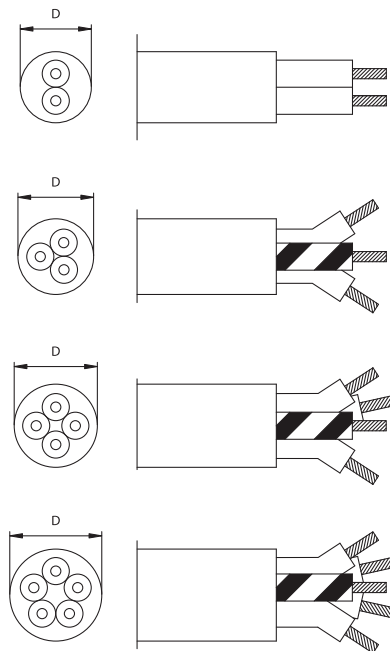

• Other sections on request.

* Colours table of the cores:

l = blue m = brown g = yellow/green
n = black e = grey r = red

• IEMMEQU - <HAR> approval printing engraved, without ink, on the sheath.

• Table of available colours:

N = black

B = white

E = grey

- Other colours on request.

