

MULTI-CONDUCTOR CABLES INSULATED IN PVC + PVC WITH COLOURED FABRIC

RH--X--

CE

Type of insulation: PVC + PVC+ COLOURED FABRIC

Working temperature: T 90°C (T70°C the fabric braid)

Type of conductor: RED COPPER

Working voltage: 300/300 V

Cable nomenclature: H03V2V2-F (*)

In conformity to the standards: EN50525-2-11:2011 (*)

In conformity to the requirements of the directives: 2014/35/EU

Approval marks: IEMMEQU - <HAR> (*)

(*) For the inner cable




RH--X--: CABLE WITH BRAID IN COLOURED FABRIC (Available in a wide variety of colours)

- Sections and multiple table of the cores:

Code	Sections mm ²	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
RH27X--	2 x 0,75	24 x 0,193	l m	round	ø 5,8
RH37X--	3 x 0,75	24 x 0,193	l m g	round	ø 6,3
RH47X--	4 x 0,75	24 x 0,193	l m n g	round	ø 6,8
RH7X--	4 x 0,75	24 x 0,193	l m n e	round	ø 6,8

- Other sections on request.

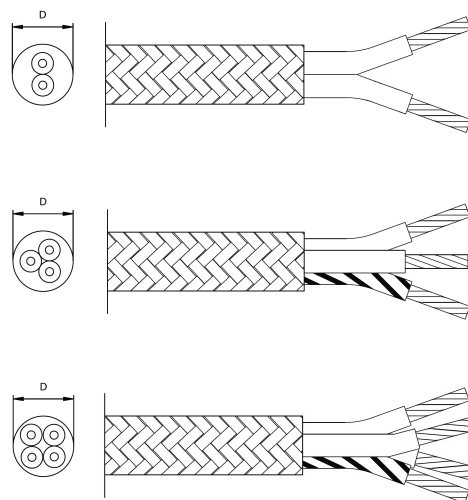

- * Colours table of the cores:

l = blue m = brown g = yellow/green
n = black e = grey

- IEMMEQU - <HAR> approval printing on the sheath of the inner cable.

