

MULTI-CONDUCTOR CABLES INSULATED IN PVC + PVC H03 T70°C

RR---

CE

Type of insulation: PVC + PVC

Working temperature: T 70°C

Type of conductor: RED COPPER

Working voltage: 300/300 V

Cable nomenclature: H03VV-F (for the round cables)
H03VVH2-F (for the flat cables)

EN 50525-2-11: 2011

In conformity to the standards:

In conformity to the requirements of the directives: 2014/35/EU

Approval marks: IEMMEQU - <HAR>



• Sections and multiple table of the cores:


Code	Sections mm ²	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
RRP0-	2 x 0,50	16 x 0,193	l m	flat	3,2 x 5,2
RRP7-	2 x 0,75	24 x 0,193	l m	flat	3,5 x 5,6
RR27-	2 x 0,75	24 x 0,193	l m	round	∅ 5,4
RR37-	3 x 0,75	24 x 0,193	l m g	round	∅ 5,9
RR77-	3 x 0,75	24 x 0,193	l m n	round	∅ 5,9
RR47-	4 x 0,75	24 x 0,193	l m n g	round	∅ 6,4
RRQ7-	4 x 0,75	24 x 0,193	l m n e	round	∅ 6,4

• Other sections on request.

* Colours table of the cores:

l = blue m = brown
n = black e = grey

g = yellow/green

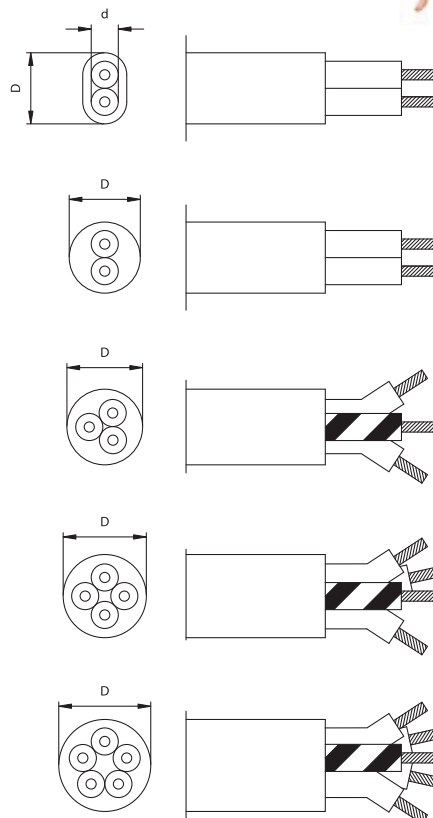

• IEMMEQU - <HAR> approval printing engraved, without ink, on the sheath.

• Table of available colours:

N = black

B = white

E = grey

O = oro

- Other colours on request.