

# BIPOLAR CABLES, FLAT AND SEPARABLE, INSULATED IN SILICONE, T180°C

**SA---**

**CE**

Type of insulation:	<b>SILICONE (SEPARABLE)</b>
Working temperature:	<b>T 180°C</b>
Type of conductor:	<b>TIN-PLATED COPPER</b>
Working voltage:	<b>230/400 V</b>
In conformity to the standards:	<b>DIN VDE 0250</b>
In conformity to the requirements of the directives:	<b>2014/35/EU</b>
Approval marks:	<b>VDE REG. Nr.</b>




- Cores separable, tacked.

- Sections and multiple table of the cores:

Code	Sections mm <sup>2</sup>	Conductor strand	Shape	Dimension ±0,2 mm
<b>SAP7-</b>	2 x 0,75	24 x 0,20	flat	2,8 x 5,6

- Other sections on request.

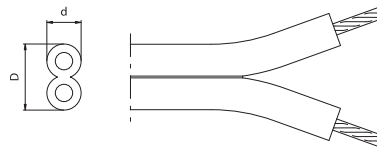

- VDE REG. Nr. approval printing, on the sheath.

- Table of available colours:  
**B** = white  
**N** = black  
 - Other colours on request.

