

MULTI-CONDUCTOR CABLES INSULATED IN “OVERSIZED” SILICONE, 0,6 / 1 kV, + SILICONE T180°C

SG---

CE

Type of insulation: “OVERSIZED” SILICONE + SILICONE

Working temperature: T 180°C

Type of conductor: TIN-PLATED COPPER


Working voltage: 0,6/1kV

Impulse voltage: 5kV

In conformity to the standards: DIN VDE 0250

In conformity to the requirements of the directives: 2014/35/EU


Approval marks, of the cores: VDE REG Nr.

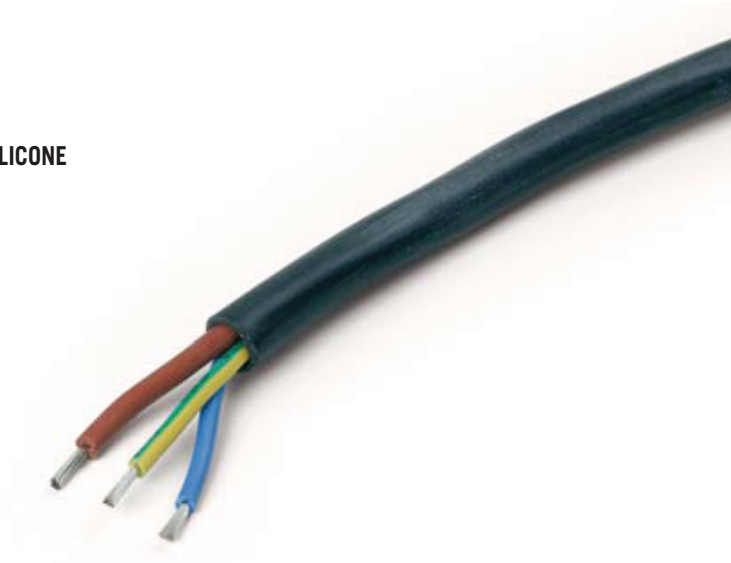

- The discharge core, with oversized insulation, is brown. The other cores, with simple insulation, are blue and yellow/green.

- Sections and multiple table of the cores:

Code	Sections mm ²	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
SG31	3 x 1,00	32 x 0,20	l m g	round	ø 8,3

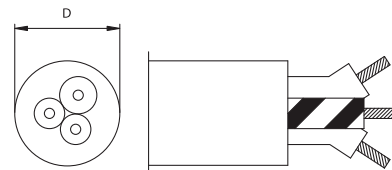

- Other sections on request.

* Colours table of the cores:

l = blue m = brown g = yellow/green

- VDE REG. Nr. approval printing on the cores under the external sheath.

- Table of available colours:
N = black
 - Other colours on request.