

# MULTI-CONDUCTOR CABLES INSULATED IN SILICONE + SILICONE T180°C

**SS---**

**CE**

**Type of insulation:** SILICONE + SILICONE  
**Working temperature:** T 180°C  
**Type of conductor:** TIN-PLATED COPPER  
**Working voltage:** 300/500 V  
**Cable nomenclature:** H05SS-F  
**In conformity to the standards:** EN 50525-2-83  
**In conformity to the requirements of the directives:** 2014/35/EU  
**Approval marks:** IEMMEQU - <HAR>




• Sections and multiple table of the cores:

Code	Sections mm <sup>2</sup>	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
<b>SS27-</b>	2 x 0,75	24 x 0,20	l m	round	∅ 6,4
<b>SS37-</b>	3 x 0,75	24 x 0,20	l m g	round	∅ 7,0
<b>SS21-</b>	2 x 1,00	32 x 0,20	l m	round	∅ 7,0
<b>SS31-</b>	3 x 1,00	32 x 0,20	l m g	round	∅ 7,2
<b>SS25-</b>	2 x 1,50	30 x 0,25	l m	round	∅ 8,3
<b>SS35-</b>	3 x 1,50	30 x 0,25	l m g	round	∅ 8,9

• Other sections on request.

\* Colours table of the cores:

l = blue                      m = brown                      g = yellow/green

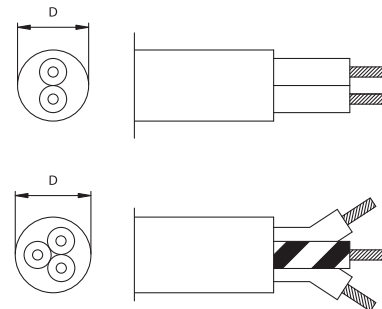

• IEMMEQU -<HAR>approval printing with ink on the sheath or on the cores.

• Table of available colours:  
**N** = black  
**B** = white  
 - Other colours on request.

