

SINGLE-CONDUCTOR CABLES INSULATED IN FEP T180°C

T0---

CE


Type of insulation:	FEP
Working temperature:	T 180°C
Type of conductor:	TIN-PLATED COPPER
Working voltage:	450/750 V
Cable nomenclature:	FR5F
In conformity to the standards:	CEI 20-51
In conformity to the requirements of the directives:	2014/35/EU
Approval marks:	IEMMEQU



• Sections table of the flexible conductor:

Code	Sections mm ²	Conductor strand	External diameter ±0,2 mm
T01C- (*)	0,23 mm ²	19 x 0,127	1,1
T019- (*)	0,35 mm ²	19 x 0,16	1,3
T010-	0,50 mm ²	19 x 0,18	1,4
T017-	0,75 mm ²	19 x 0,23	1,6
T011-	1,00 mm ²	19 x 0,26	1,8
T015-	1,50 mm ²	19 x 0,32	2,2
T012-	2,50 mm ²	19 x 0,41	2,7

- Other sections on request.
- (*) Section not approved IMQ.

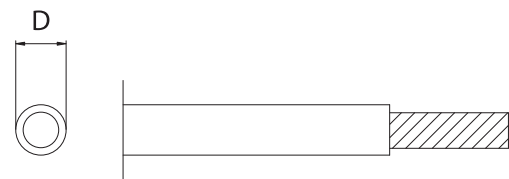

• Table of available colours:

- T** = transparent
- B** = white
- L** = blue
- M** = brown
- N** = black
- R** = red
- Other colours on request.

Note: this kind of cables may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").

- IEMMEQU approval printing on the sheath.

