

COAXIAL CABLES FOR LED APPLICATIONS INSULATED IN FEP + SCREENING + FEP

TB2-- 2010

Type of insulation: FEP + SCREENING + FEP (COAXIAL)

Working temperature: T 180°C for the sheath
T 180°C for the inner core

Type of conductor: TIN-PLATED COPPER (for the internal core)
TIN-PLATED COPPER (for the screening)

Working voltage: 60 V
In conformity to the requirements of the directive: 2014/35/EU


Approval marks:



- Sheath in bright FEP.

- Tabella delle sezioni e dei multipli dei conduttori:

Code	Section mm ²	Conductor internal strand	Screening external strand	Dimension d	Dimension ±0,2 mm D
TB29-	2 x 0,35	19 x 0,16	16 x 4 x 0,10	1,3	2,2
TB20-	2 x 0,50	19 x 0,18	16 x 4 x 0,10	1,4	2,3
TB27-	2 x 0,75	19 x 0,23	16 x 6 x 0,10	1,6	2,5

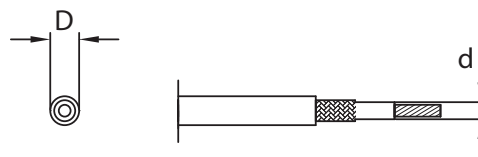

- Table of available colors:

T = transparent

N = black

B = white

- Other colours on request.

