

SINGLE-CONDUCTOR CABLES INSULATED IN FEP + FEP + FEP, TRIPLE INSULATION, T180°C

TE---

1994

CE

Type of insulation: FEP + FEP + FEP

Working temperature: T 180°C

Type of conductor: TIN-PLATED COPPER

Working voltage: 300/300 V

In conformity to the standards, with reference to the inner core: **DIN VDE 0250**

In conformity to the requirements of the directives: **2014/35/EU**

Approval marks, of the inner core, in double insulation: **VDE REG Nr.**




Triple insulated cable to be applied in class II fixtures.

- Sections table of the flexible conductor:

Code	Sections mm ²	Conductor strand	External diameter ±0,2 mm
TE10-	0,50 mm ²	19 x 0,18	2,4
TE17-	0,75 mm ²	19 x 0,23	2,6

- Other sections on request.

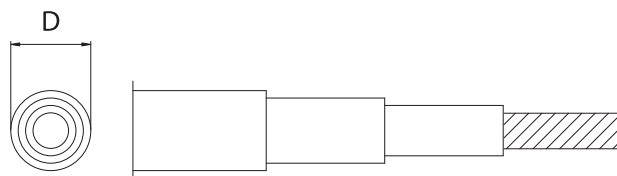

- Table of available colours:
- T** = transparent + transparent + transparent
- B** = white + transparent + transparent
- L** = blue + transparent + transparent
- M** = brown + transparent + transparent
- N** = black + transparent + transparent
- Other colours on request.

- VDE REG. Nr. approval printing, on the sheath of the inner core in double insulation.

Note: this kind of cables may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").

